


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.65V I:0.1109A P:25.406W PF:0.9932 Freq:49.98Hz Lamp Flux:3976.59x1 lm		
NAME: WALL CYLIN	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:NW, CITIZEN, BA-40°	DIM.: 216 x 166 x 200	SERIAL No.:5132
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 94.17 lm/W
MODEL	KL-3655	I _{max} (cd)	5000	S/MH (C0/180)	0.58	
NOMINAL POWER (W)	25	LOR (%)	60.2	S/MH (C90/270)	0.59	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	2392.4	η UP, DN (C0-180)	0.0, 30.1	
NOMINAL FLUX (lm)	3976.59	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 30.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	230	η down (%)	60.2	CIBSE SHR MAX	0.60	

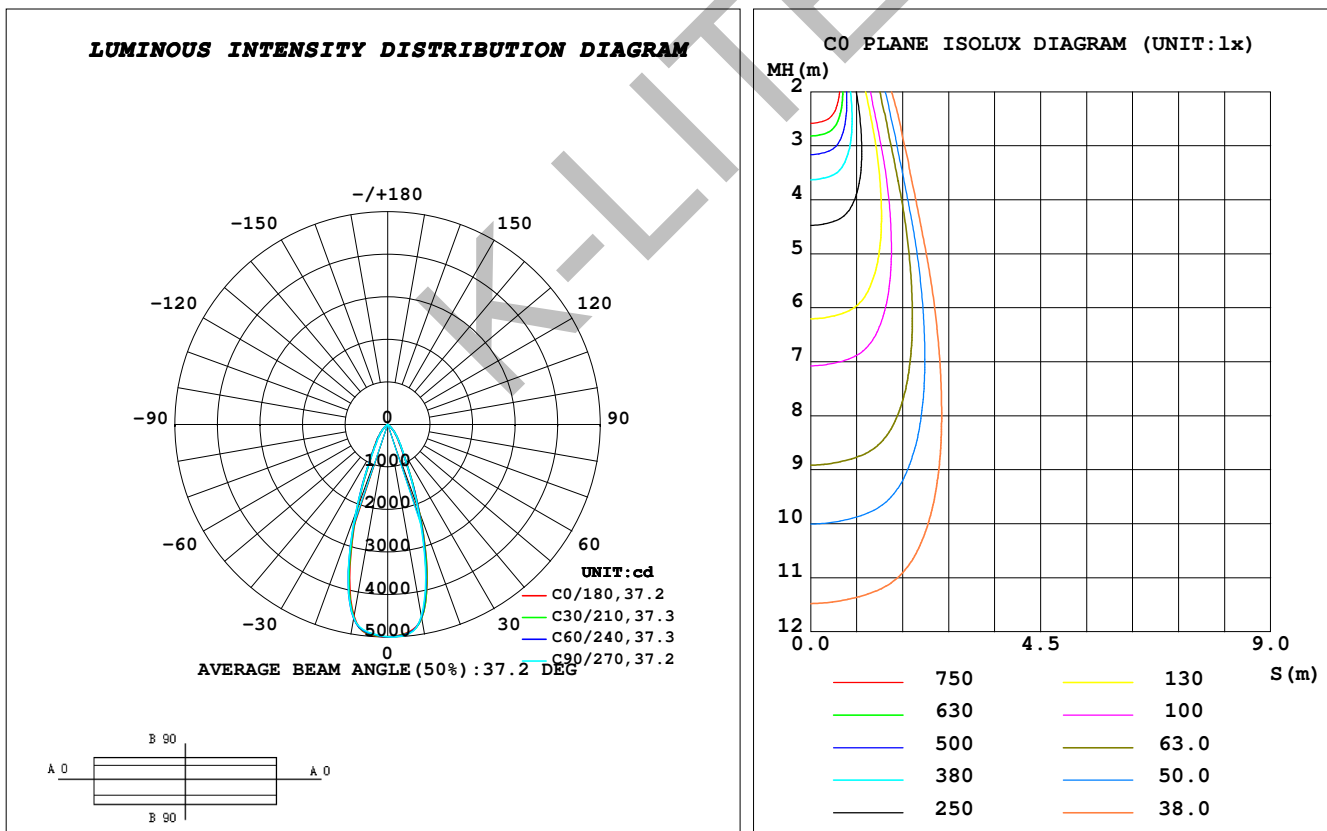

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 21 November 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: