



LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.44V I:0.0873A P:19.824W PF:0.9853 Freq:50.00Hz Lamp Flux:2363.06x1 lm		
NAME: PROXIMA	TYPE:CEILING LUMINAIRES	WEIGHT:
SPEC.:WW, CITIZEN	DIM.: Ø64 x 108 x 210	SERIAL No.:2095
MFR.: K-LITE	SUR.:	Shielding Angle:12°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 73.85 lm/W
MODEL	KL-3681	Imax (cd)	12687	S/MH (C0/180)	0.27	
NOMINAL POWER(W)	20	LOR(%)	62.0	S/MH (C90/270)	0.24	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	1464.0	η UP, DN (C0-180)	0.0, 32.1	
NOMINAL FLUX(lm)	2363.06	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 29.8	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	62.0	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

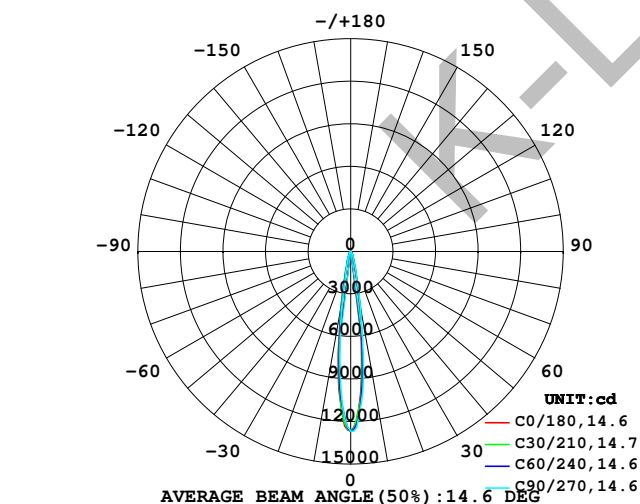

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

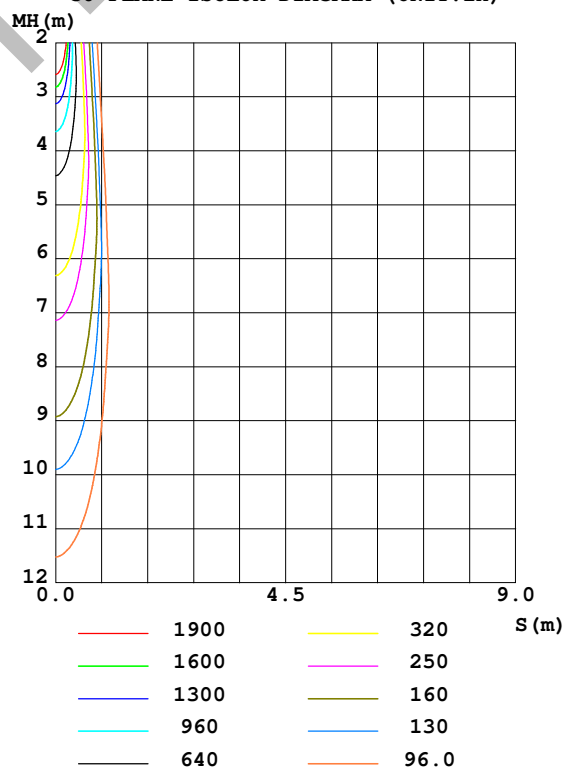

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 05 October 2020

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.825m [K=1.0000]
 Remarks: