
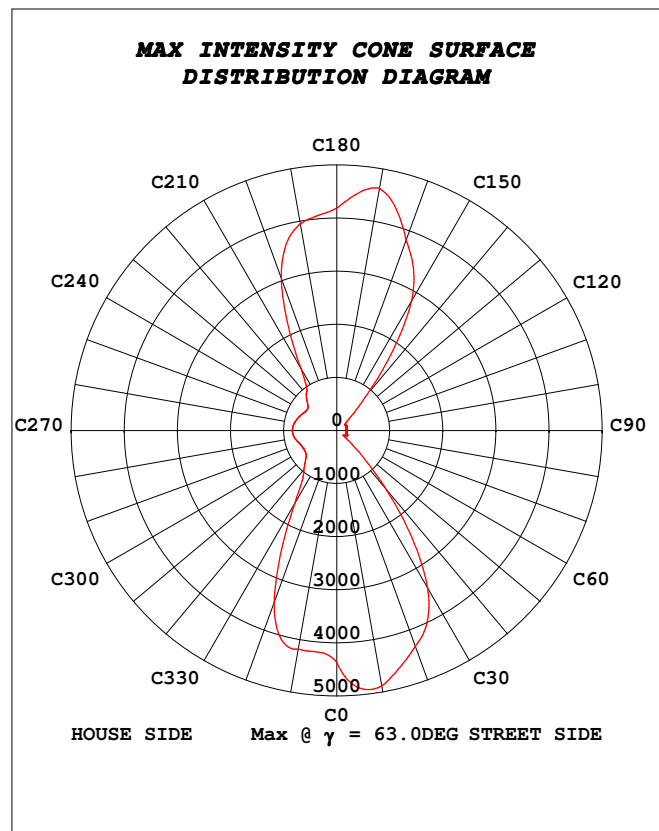


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.47V I:0.2651A P:60.774W PF:0.9945 Freq:50.00Hz Lamp Flux:11115.8x1 lm		
NAME: WACO PRO MINI	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:3.360Kg
SPEC.:4000K, LUMILED, TYPE II, 70 CRI	DIM.: 555 x 210 x 143	SERIAL No.:INT/2024/04/65
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 151.80 lm/W
MODEL	KL-4328	I _{max} (cd)	4886	η street_up (%)	0.0	
NOMINAL POWER (W)	60	LOR (%)	83.0	η street_down (%)	49.3	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	9225	η house_up (%)	0.0	
NOMINAL FLUX (lm)	11115.8	MAXIMUM @ (C, γ)	10,63.0	η house_down (%)	33.7	
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100	
TEST VOLTAGE (V)	230	η down (%)	83.0	SLI	21.380	

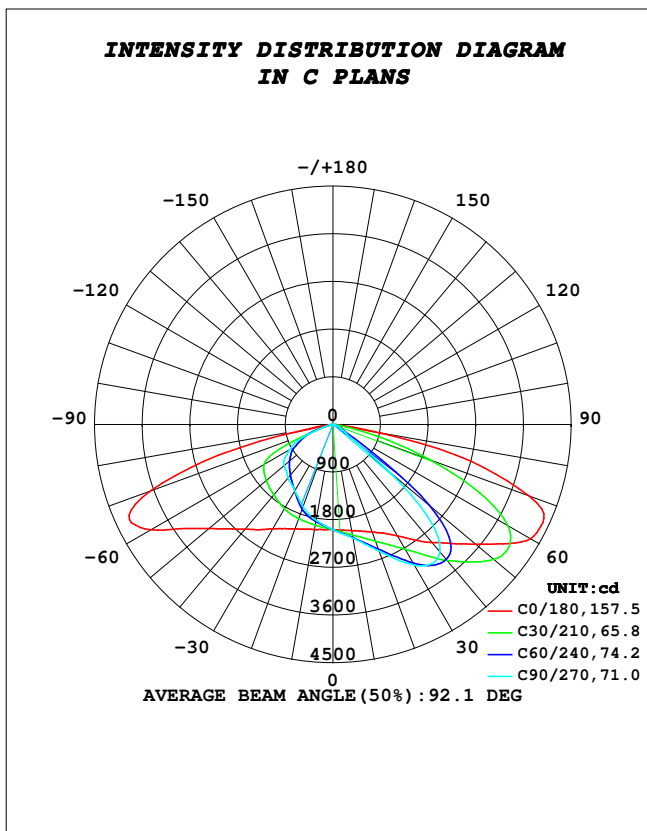

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.8DEG
Operators: K-LITE
Test Date: 06 May 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 40.2%
Test Distance: 1.997m [K=1.0000]
Remarks: