
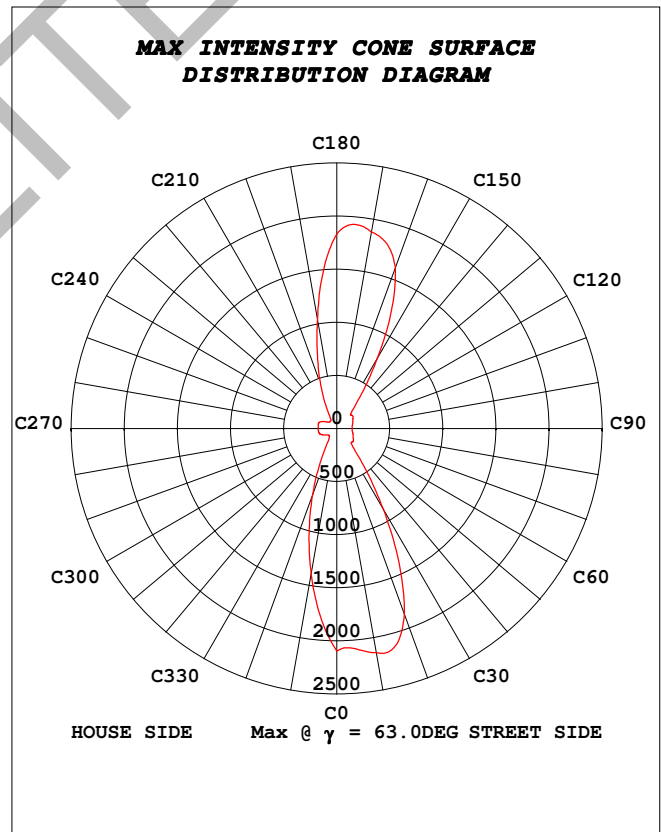


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.46V I:0.1292A P:29.272W PF:0.9835 Freq:49.99Hz Lamp Flux:4075.5x1 lm		
NAME: KAYAL MINI	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 211 x Ø166 x 110	SERIAL No.:3961
MFR.: K-LITE	SUR.:	Shielding Angle:TYPE II

DATA OF LAMP		PHOTOMETRIC DATA Eff: 115.77 lm/W			
MODEL	KL-4370	I _{max} (cd)	2143	η street_up (%)	0.0
NOMINAL POWER (W)	30	LOR (%)	83.2	η street_down (%)	55.4
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3389	η house_up (%)	0.0
NOMINAL FLUX (lm)	4075.5	MAXIMUM @ (C, γ)	10, 63.0	η house_down (%)	27.7
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100
TEST VOLTAGE (V)	230	η down (%)	83.2	SLI	18.525

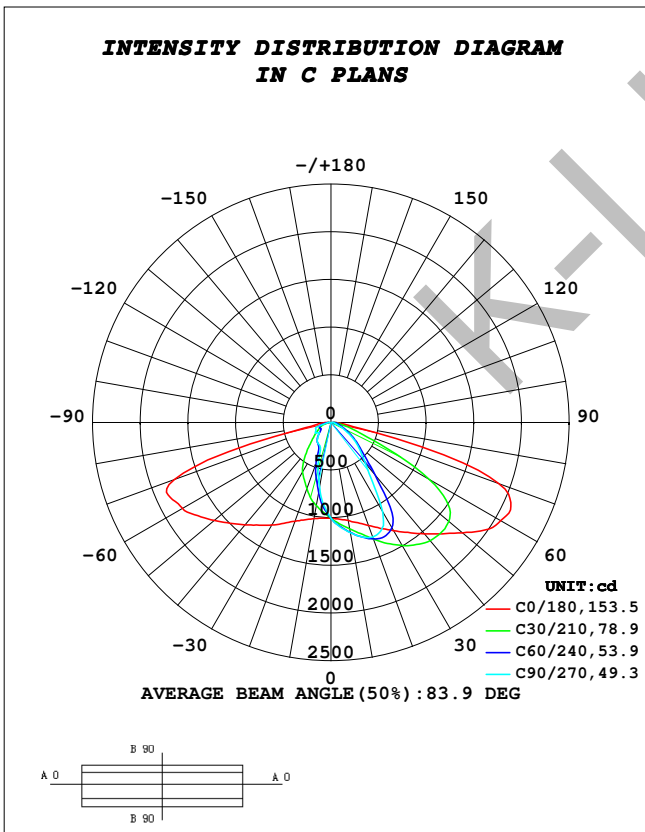

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 15 January 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: