
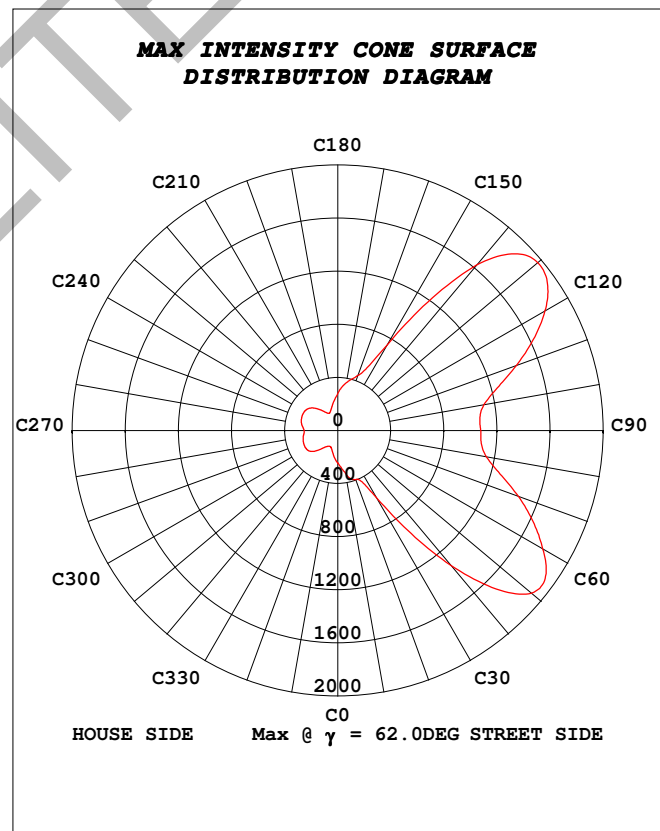


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.44V I:0.1662A P:38.094W PF:0.9948 Freq:49.99Hz Lamp Flux:6132x1 lm		
NAME: AVENUE 40	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:1.32kg
SPEC.:CW, LUMILED	DIM.: 378 x 120 x 72	SERIAL No.:5232
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4391	Imax (cd)	1967	η street_up (%)	0.0
NOMINAL POWER (W)	40	LOR (%)	60.1	η street_down (%)	45.8
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3688	η house_up (%)	0.0
NOMINAL FLUX (lm)	6132	MAXIMUM @ (C, γ)	130, 62.0	η house_down (%)	14.3
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.00100
TEST VOLTAGE (V)	230	η down (%)	60.1	SLI	13.952

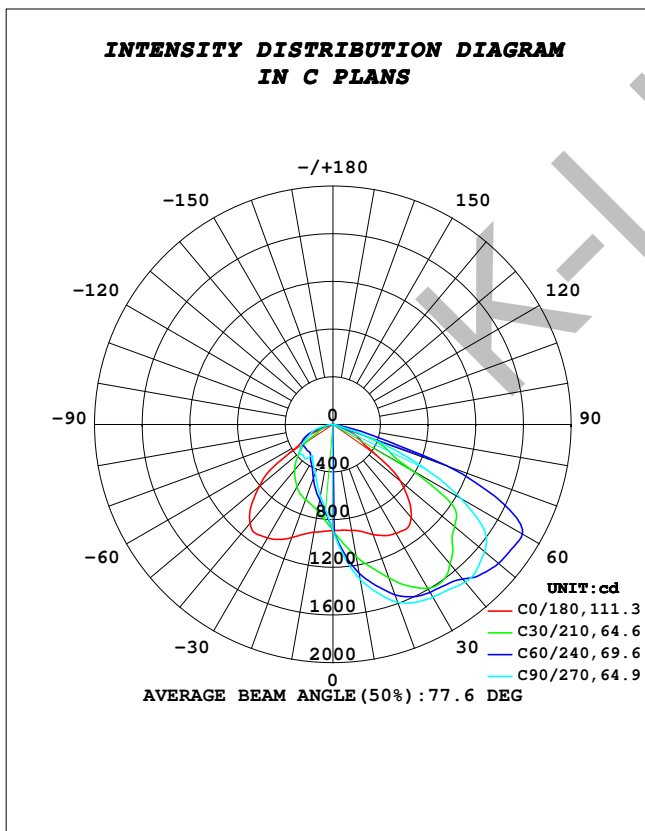

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 08 December 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.852m [K=1.0000]
 Remarks: