
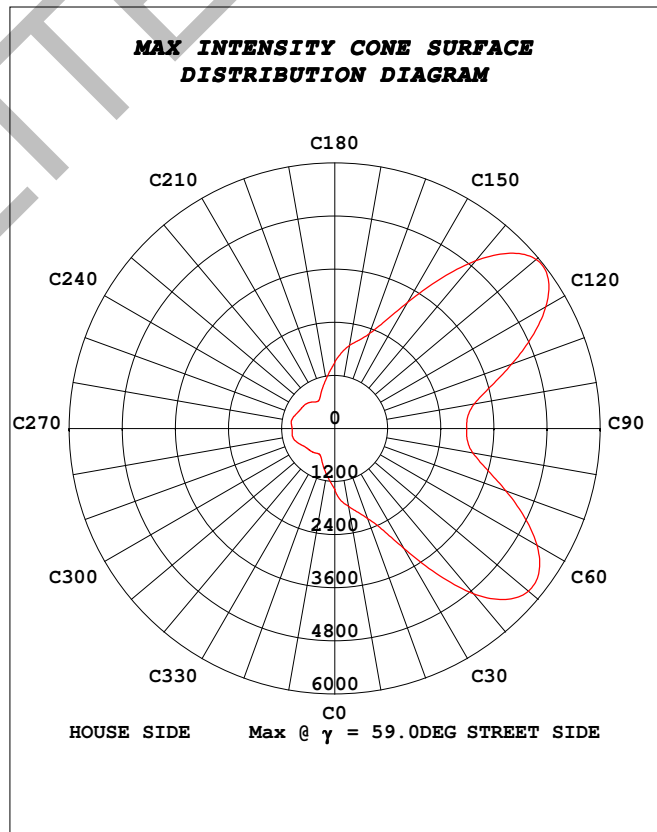


STREETLIGHT PHOTOMETRIC TEST REPORT

Test:U:230.32V I:0.4193A P:96.321W PF:0.9974 Freq:49.99Hz Lamp Flux:14628x1 lm		
NAME: AVENUE 100	TYPE:POLE MOUNTED SYSTEMS	WEIGHT:3.49Kg
SPEC.:NW, LUMILED	DIM.: 526 x 174 x 90	SERIAL No.:5237
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 120.16 lm/W			
MODEL	KL-4392	Imax(cd)	5944	η street_up(%)	0.0
NOMINAL POWER(W)	100	LOR(%)	79.1	η street_down(%)	57.9
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	11574	η house_up(%)	0.0
NOMINAL FLUX(lm)	14628	MAXIMUM @ (C, γ)	130,59.0	η house_down(%)	21.3
LAMPS INSIDE	1	η up(%)	0.0	76 FLASHAREA(m2)	0.00100
TEST VOLTAGE(V)	230	η down(%)	79.1	SLI	15.850

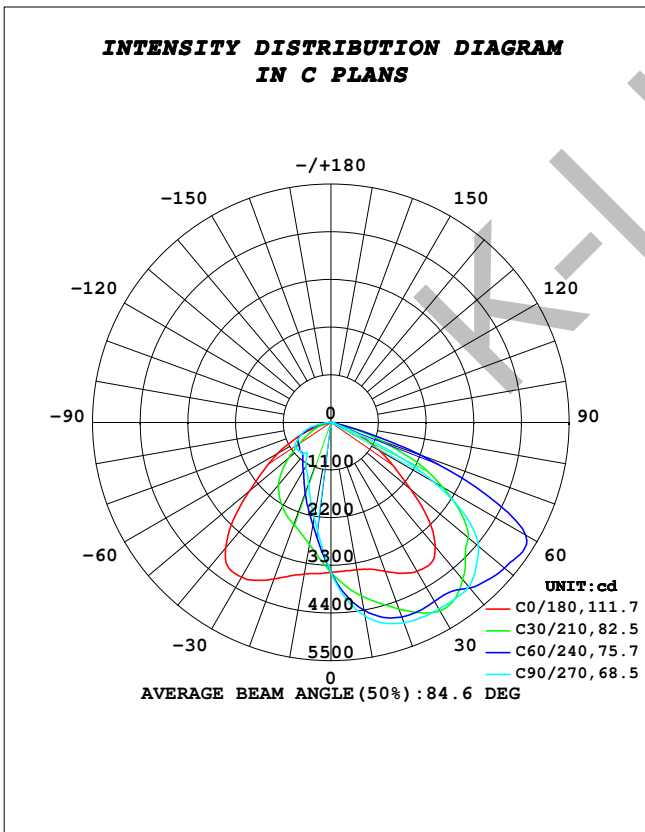

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 10 December 2022

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.943m [K=1.0000]
Remarks: