


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.53V I:0.0558A P:12.389W PF:0.9624 Freq:50.00Hz Lamp Flux:1551.2x1 lm		
NAME: MARCONA BOLLARD	TYPE:BOLLARDS	WEIGHT:
SPEC.:WW, CITIZEN	DIM.: 325 x 80 x 500	SERIAL No.:4564
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-4763	Imax (cd)	657.7	S/MH (C0/180)	0.36
NOMINAL POWER (W)	12	LOR (%)	65.4	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1014.9	η UP, DN (C0-180)	0.0, 33.1
NOMINAL FLUX (lm)	1551.2	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 32.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	65.4	CIBSE SHR MAX	0.50

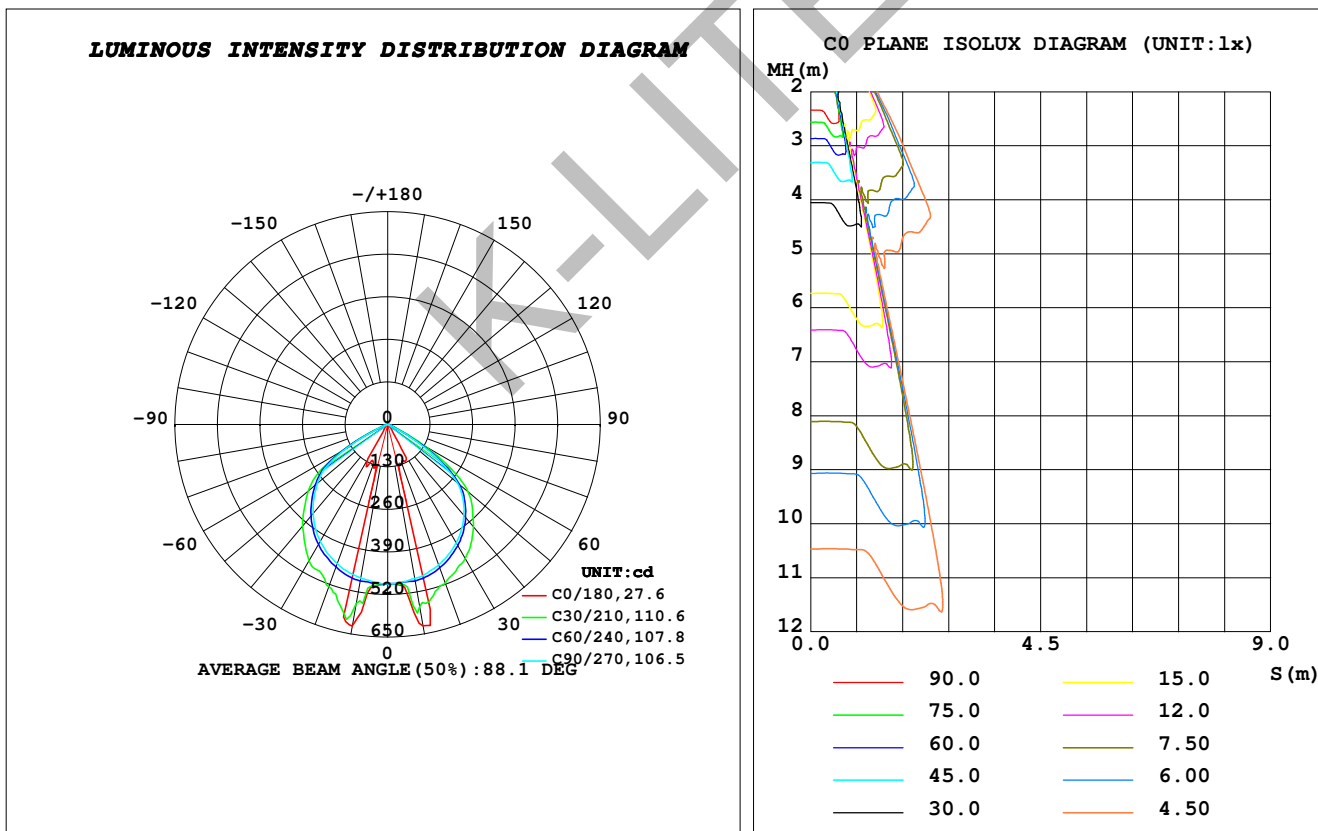

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: K-LITE
 Test Date: 19 May 2022

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 65.0%
 Test Distance: 1.943m [K=1.0000]
 Remarks: