


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.57V I:0.0396A P:8.8055W PF:0.9644 Freq:50.00Hz Lamp Flux:967.68x1 lm		
NAME: SLEEK AJNA BOLLARD	TYPE:BOLLARDS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: Ø100 x 270	SERIAL No.:4999
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-5560	Imax (cd)	79.02	S/MH (C0/180)	10.89
NOMINAL POWER (W)	8	LOR (%)	34.0	S/MH (C90/270)	11.35
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	329.11	η UP, DN (C0-180)	3.7,13.0
NOMINAL FLUX (lm)	967.68	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	3.6,13.6
LAMPS INSIDE	1	η up (%)	7.3	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	230	η down (%)	26.7	CIBSE SHR MAX	1.55

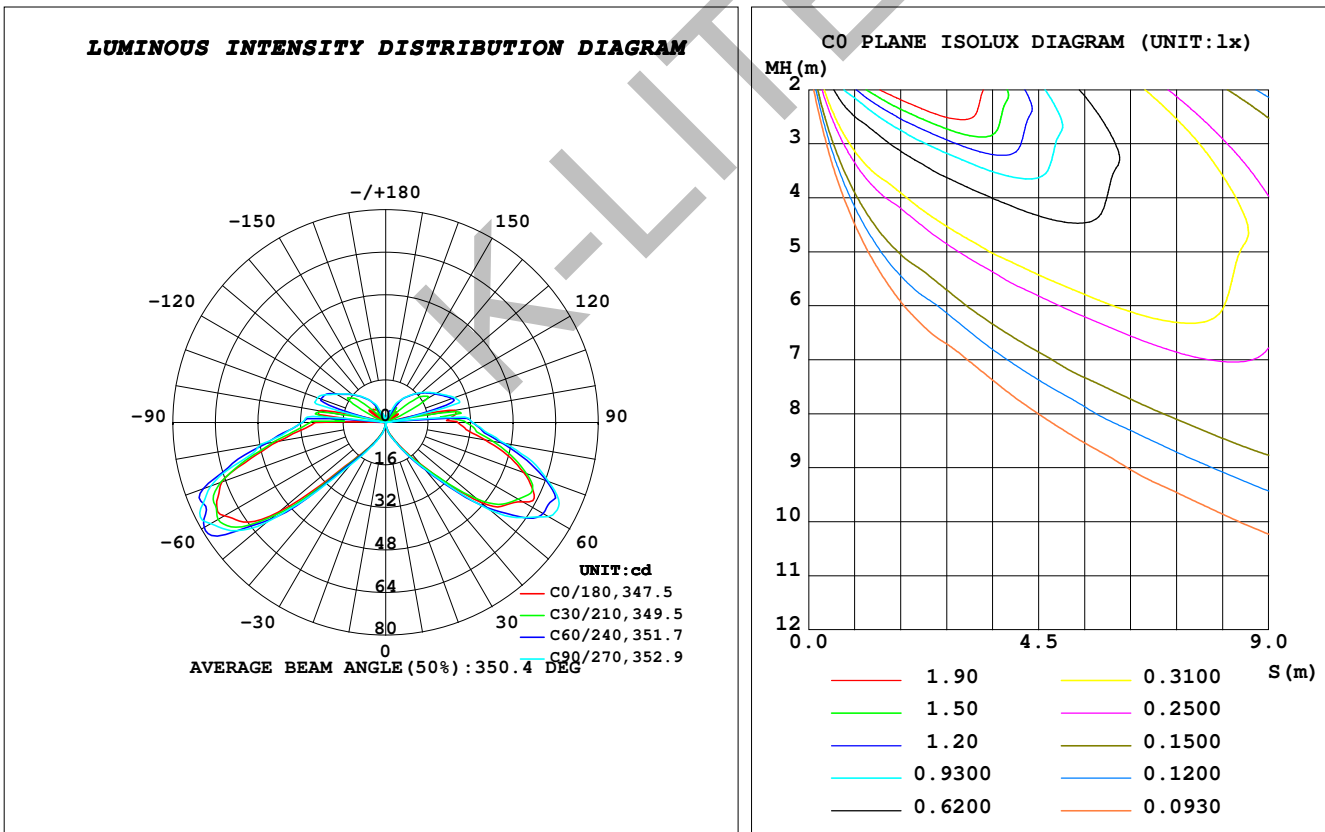

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 26 September 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: