
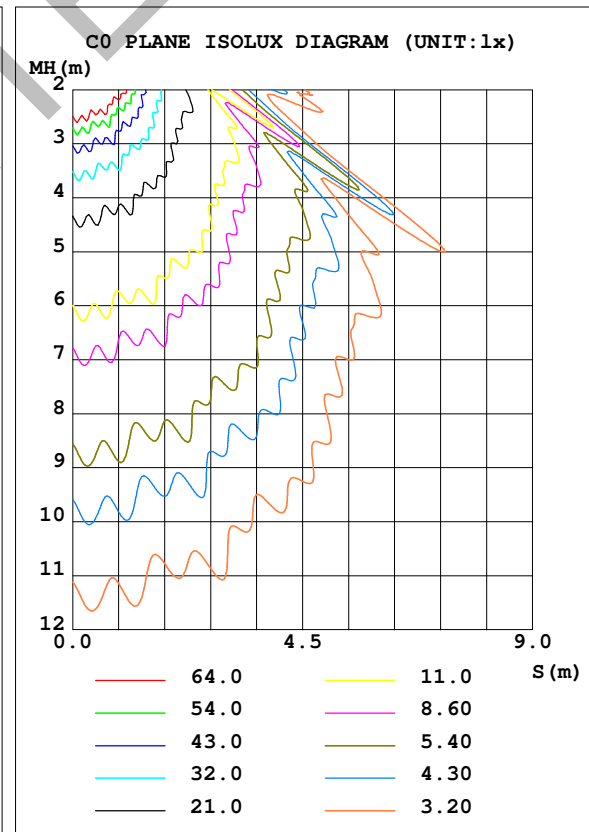


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.20V I:0.1556A P:12.698W PF:0.3544 Freq:50.00Hz Lamp Flux:1498.5x1 lm		
NAME: BRICKO	TYPE:WALL LUMINAIRES	WEIGHT:
SPEC.:WW, NICHIA	DIM.: 130 x 116 x 250	SERIAL No.:0643
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-5616	Imax (cd)	434.7	S/MH (C0/180)	1.28
NOMINAL POWER (W)	12	LOR (%)	84.1	S/MH (C90/270)	1.33
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1260.5	η UP, DN (C0-180)	0.0, 41.4
NOMINAL FLUX (lm)	1498.5	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 42.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	84.1	CIBSE SHR MAX	1.35

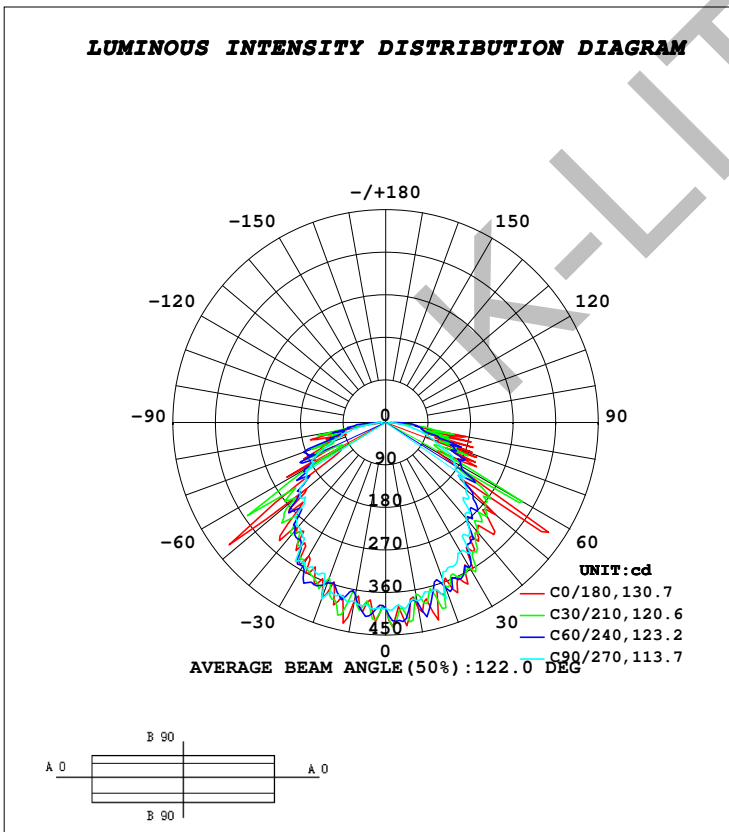

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 28 December 2019

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.825m [K=1.0000]
Remarks: