


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.71V I:0.1773A P:40.732W PF:0.9956 Freq:49.99Hz Lamp Flux:5250x1 lm		
NAME: NAVI	TYPE:FLOOD LIGHTS	WEIGHT:
SPEC.:WW, NICHIA	DIM.: Ø166 x 153 x 423	SERIAL No.:4618
MFR.: K-LITE	SUR.:	Shielding Angle:45°

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 92.01 lm/W
MODEL	KL-6805	I <sub>max</sub> (cd)	7183	S/MH (C0/180)	0.60	
NOMINAL POWER (W)	45	LOR (%)	71.4	S/MH (C90/270)	0.65	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	3747.5	η UP, DN (C0-180)	0.0, 33.3	
NOMINAL FLUX (lm)	5250	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 38.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	230	η down (%)	71.4	CIBSE SHR MAX	0.65	

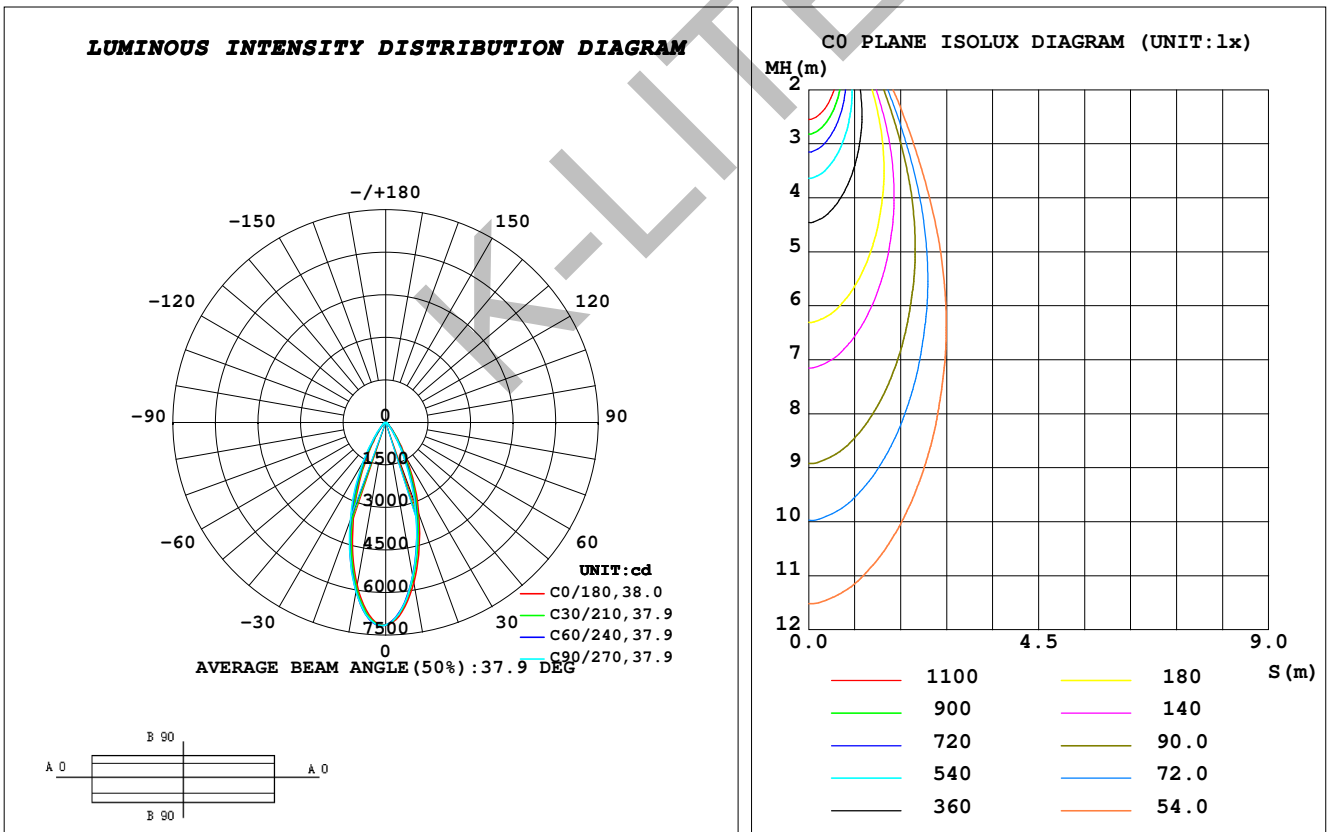

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 18 June 2022**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 65.0%**  
**Test Distance: 1.825m [K=1.0000]**  
**Remarks:**