
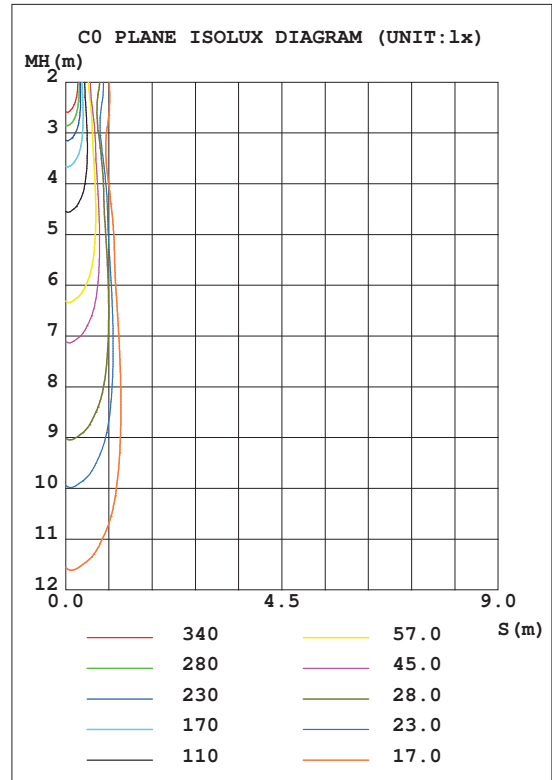


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.15V I:0.0115A P:2.5698W PF:0.9724 Freq:49.99Hz Lamp Flux:319.14x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:2700K, LUMILED, BA-15°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/91A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 99.71 lm/W
MODEL	KL-6988	I _{max} (cd)	2292	S/MH (C0/180)	0.22	
NOMINAL POWER (W)	3	LOR (%)	80.3	S/MH (C90/270)	0.24	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	256.25	η UP, DN (C0-180)	0.0, 39.6	
NOMINAL FLUX (lm)	319.14	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 40.7	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	80.3	CIBSE SHR MAX	1.00	

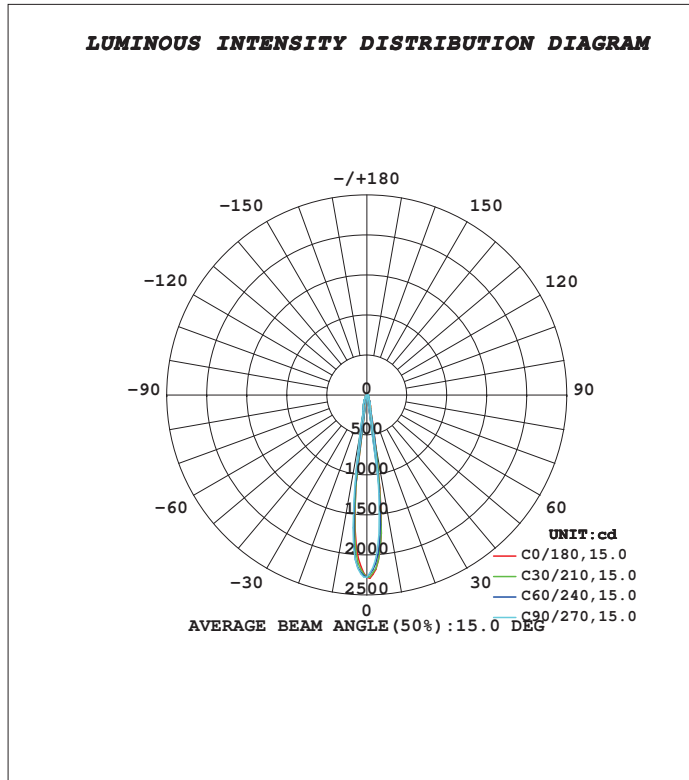

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.7DEG
 Operators: K-LITE
 Test Date: 25 July 2024

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 44.2%
 Test Distance: 2.001m [K=1.0000]
 Remarks:

APPLICABLE ID - KL-6998