
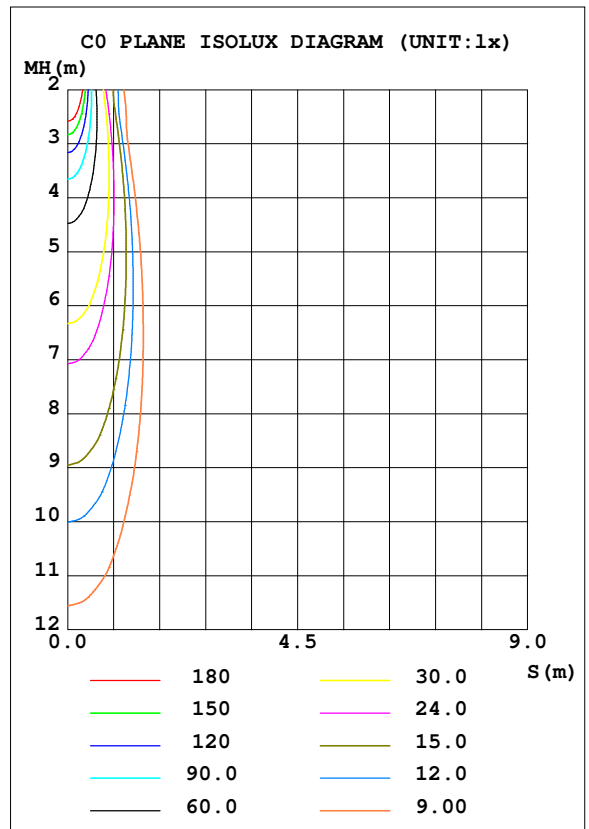


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.15V I:0.0109A P:2.4474W PF:0.9733 Freq:50.00Hz Lamp Flux:327.888x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:4000K, LUMILED, BA-25°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/93B
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 99.28 lm/W
MODEL	KL-6988	Imax (cd)	1210	S/MH (C0/180)	0.37	
NOMINAL POWER (W)	3	LOR (%)	74.1	S/MH (C90/270)	0.36	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	242.98	η UP, DN (C0-180)	0.0, 36.7	
NOMINAL FLUX (lm)	327.888	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 37.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	74.1	CIBSE SHR MAX	1.00	

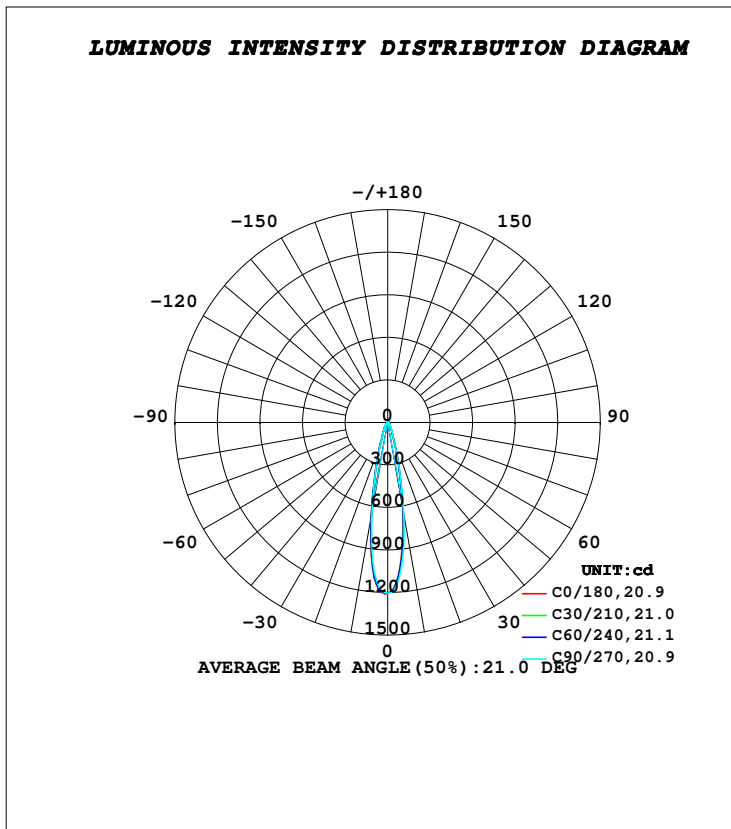

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.3DEG**  
**Operators: K-LITE**  
**Test Date: 26 July 2024**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 43.1%**  
**Test Distance: 2.001m [K=1.0000]**  
**Remarks:**

**APPLICABLE ID - KL-6998**