
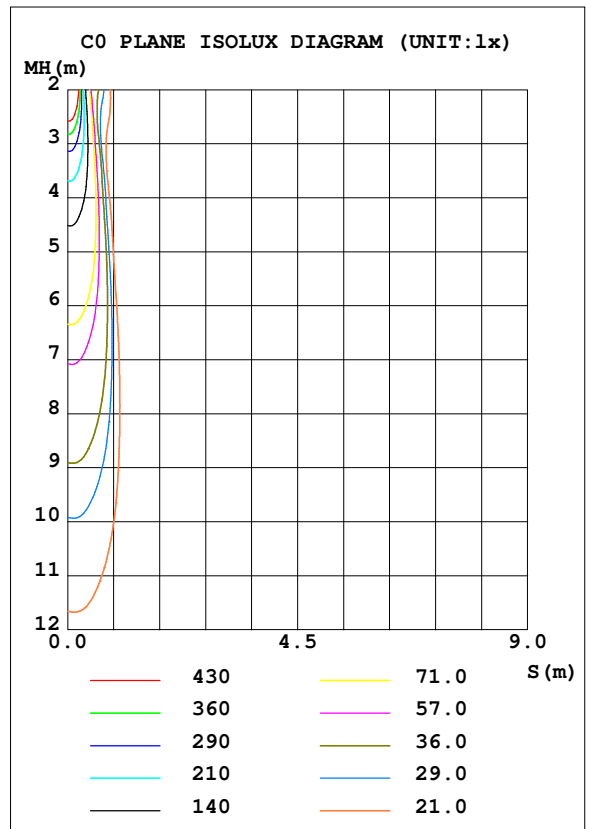


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.16V I:0.0111A P:2.4711W PF:0.9710 Freq:49.99Hz Lamp Flux:338.904x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:5700K, LUMILED, BA-15°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/94A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 109.45 lm/W			
MODEL	KL-6988	Imax (cd)	2926	S/MH (C0/180)	0.20
NOMINAL POWER (W)	3	LOR (%)	79.8	S/MH (C90/270)	0.24
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	270.46	η UP, DN (C0-180)	0.0, 36.7
NOMINAL FLUX (lm)	338.904	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 43.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	79.8	CIBSE SHR MAX	1.00

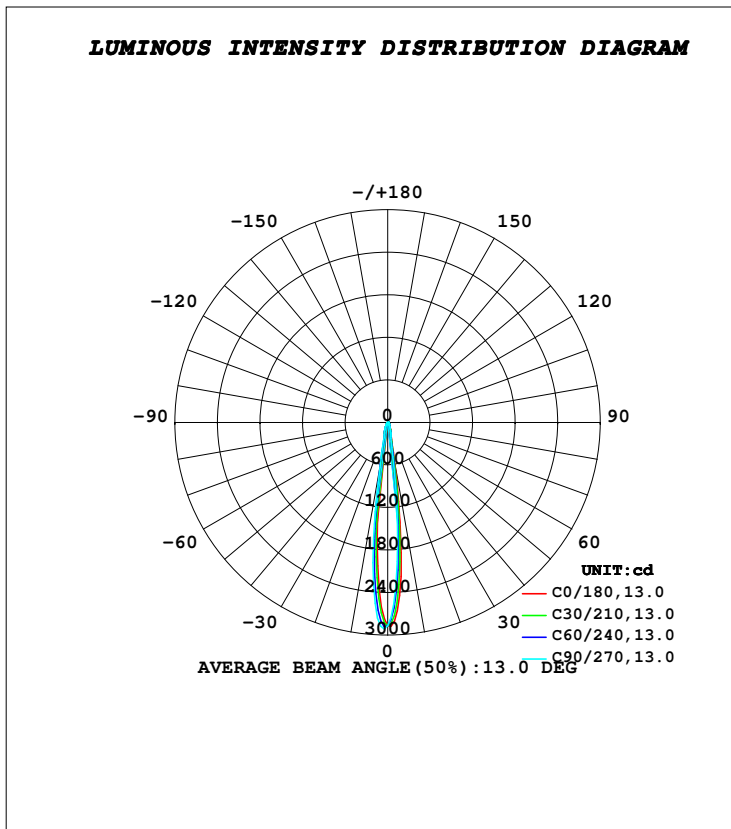

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.4DEG
Operators: K-LITE
Test Date: 29 July 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 38.5%
Test Distance: 2.001m [K=1.0000]
Remarks:
APPLICABLE ID - KL-6998