


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.70V I:0.0246A P:2.4674W PF:0.4339 Freq:50.00Hz Lamp Flux:243x1 lm		
NAME: TRIOSCAPE - SPIKE	TYPE:FLOOD LIGHTS	WEIGHT:
SPEC.:WW, LUMILED, BA-40°	DIM.: 100 x 116 x 447	SERIAL No.:4968
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-6998	Imax (cd)	481.1	S/MH (C0/180)	0.57
NOMINAL POWER (W)	3	LOR (%)	85.5	S/MH (C90/270)	0.51
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	207.88	η UP, DN (C0-180)	0.0, 46.7
NOMINAL FLUX (lm)	243	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 38.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	230	η down (%)	85.5	CIBSE SHR MAX	0.60

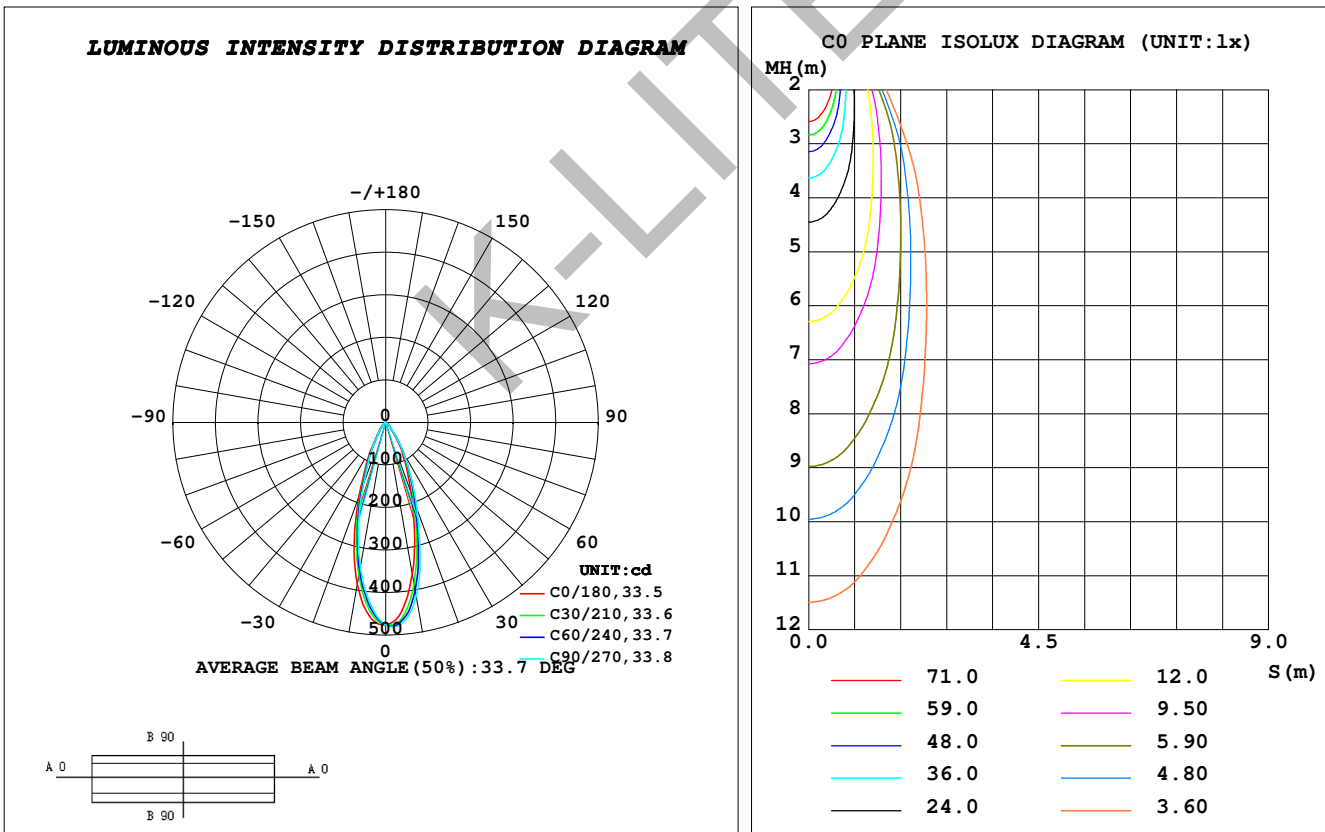

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 20 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: