
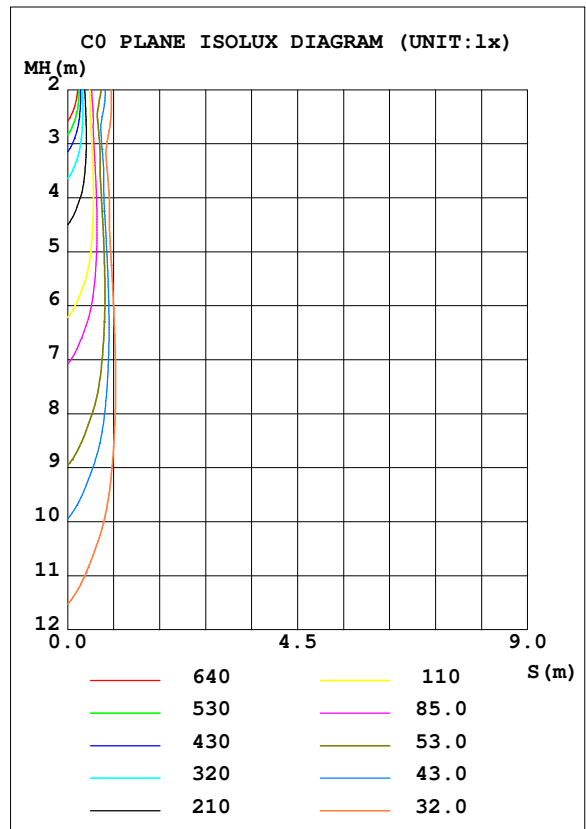


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.23V I:0.0261A P:5.9149W PF:0.9851 Freq:50.00Hz Lamp Flux:683.385x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:2700K, LUMILED, BA-15°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/86A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 83.34 lm/W
MODEL	KL-7057	I <sub>max</sub> (cd)	4318	S/MH (C0/180)	0.27	
NOMINAL POWER (W)	6	LOR (%)	72.1	S/MH (C90/270)	0.23	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	492.92	η UP, DN (C0-180)	0.0, 37.8	
NOMINAL FLUX (lm)	683.385	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 34.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	72.1	CIBSE SHR MAX	1.00	

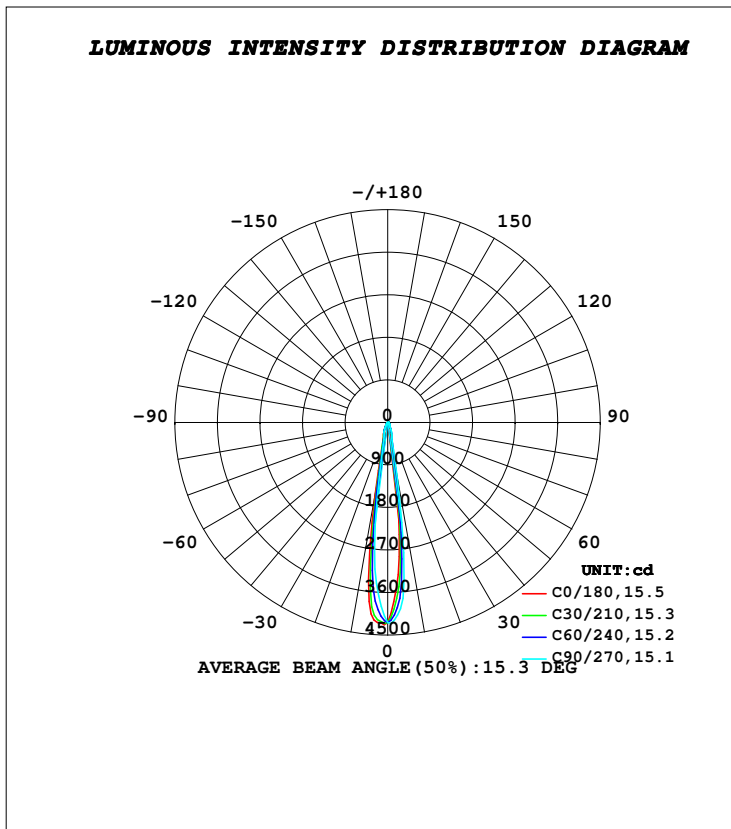

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.7DEG  
 Operators:K-LITE  
 Test Date:22 July 2024

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 45.0%  
 Test Distance:2.001m [K=1.0000]  
 Remarks:  
 APPLICABLE ID - KL-7052