
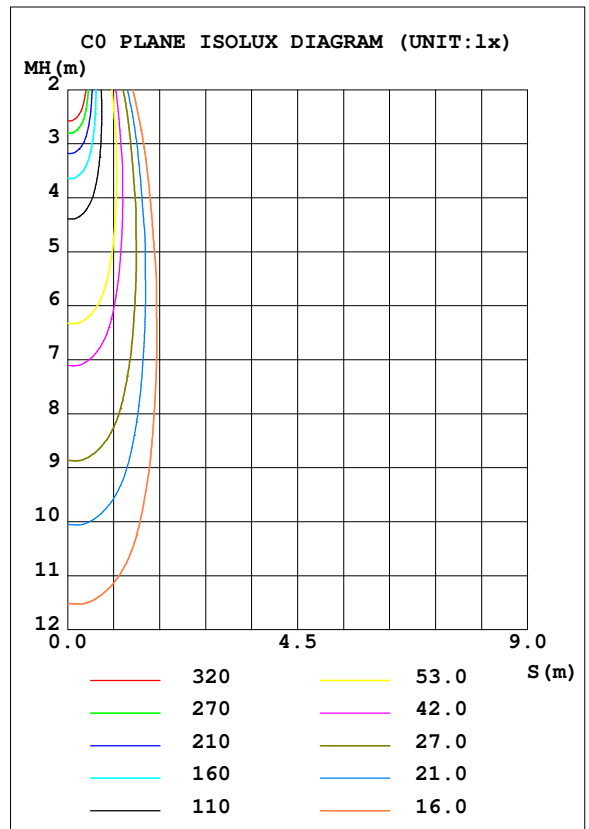


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.15V I:0.0272A P:6.1769W PF:0.9881 Freq:49.99Hz Lamp Flux:708.18x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:3000K, LUMILED, BA-25°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/87B
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.49 lm/W
MODEL	KL-7057	I <sub>max</sub> (cd)	2126	S/MH (C0/180)	0.35	
NOMINAL POWER (W)	6	LOR (%)	74.6	S/MH (C90/270)	0.39	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	528.08	η UP, DN (C0-180)	0.0, 37.5	
NOMINAL FLUX (lm)	708.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 37.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	74.6	CIBSE SHR MAX	1.00	

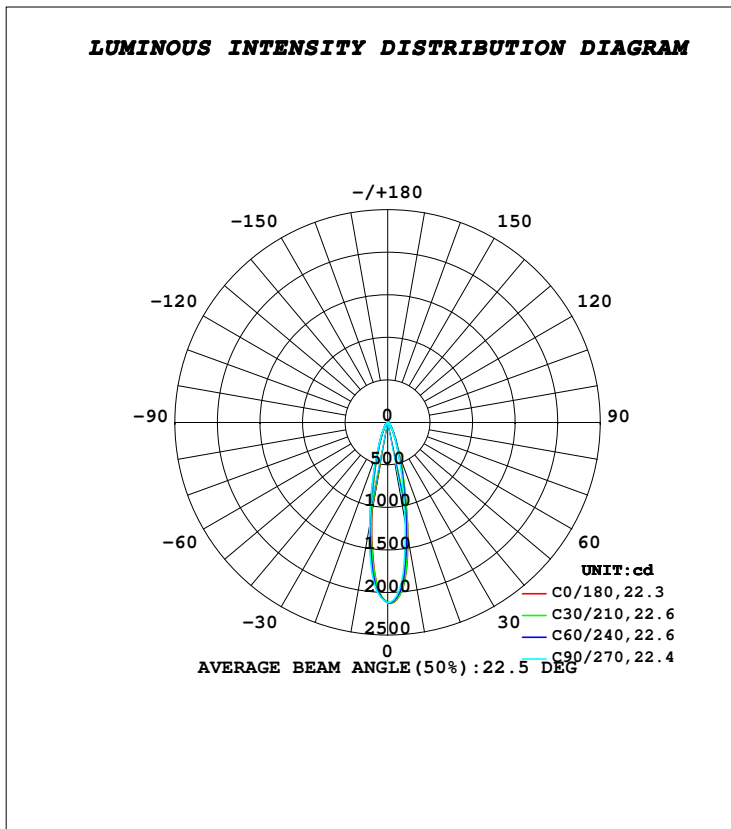

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.6DEG**  
**Operators: K-LITE**  
**Test Date: 23 July 2024**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 42.2%**  
**Test Distance: 2.001m [K=1.0000]**  
**Remarks:**  
**APPLICABLE ID - KL-7052**