
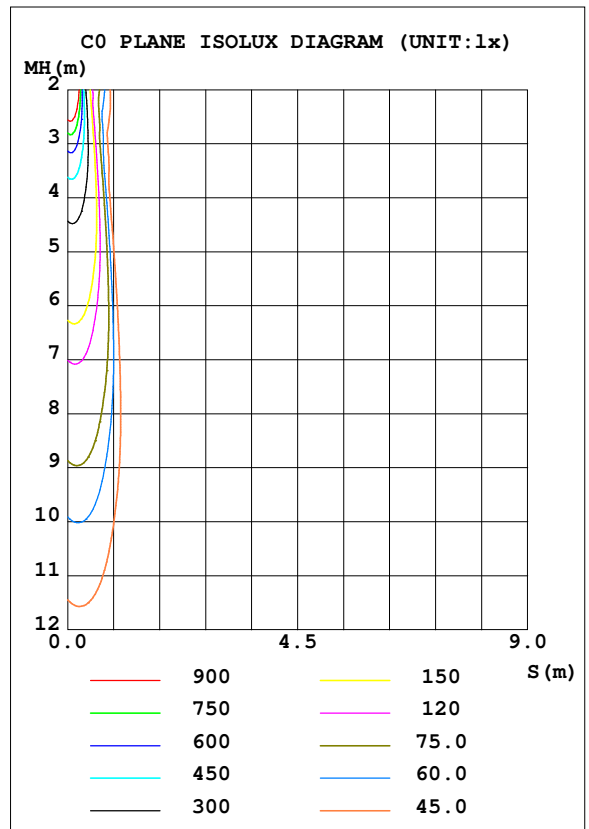


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.13V I:0.0271A P:6.1603W PF:0.9887 Freq:49.99Hz Lamp Flux:708.18x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:3000K, LUMILED, BA-15°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/87A
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-7057	Imax (cd)	6056	S/MH (C0/180)	0.19
NOMINAL POWER (W)	6	LOR (%)	75.8	S/MH (C90/270)	0.23
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	536.45	η UP, DN (C0-180)	0.0, 35.9
NOMINAL FLUX (lm)	708.18	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 39.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	75.8	CIBSE SHR MAX	1.00

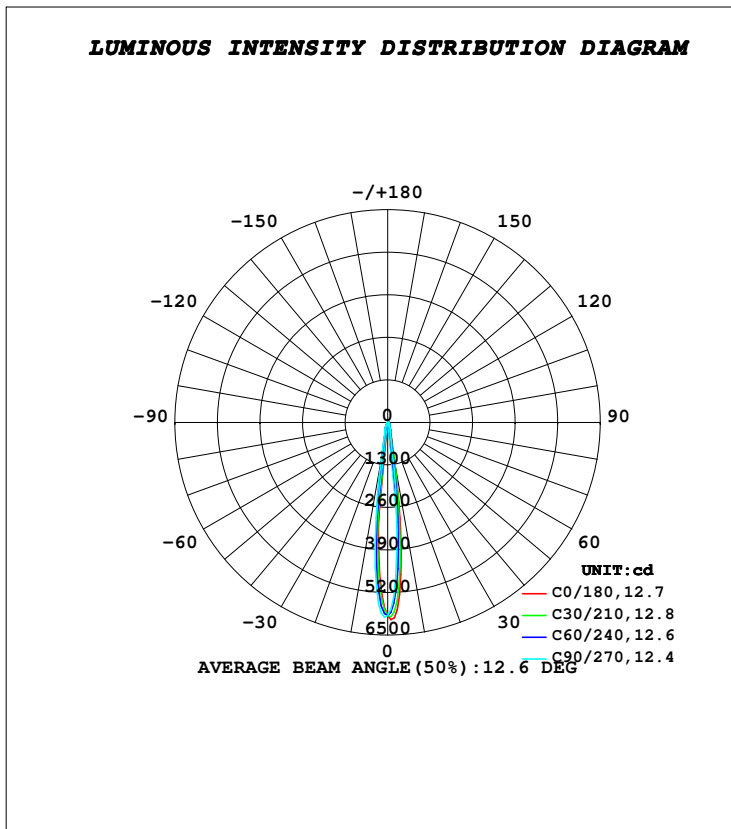

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.8DEG
Operators: K-LITE
Test Date: 23 July 2024

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 45.0%
Test Distance: 2.001m [K=1.0000]
Remarks:
APPLICABLE ID - KL-7052