
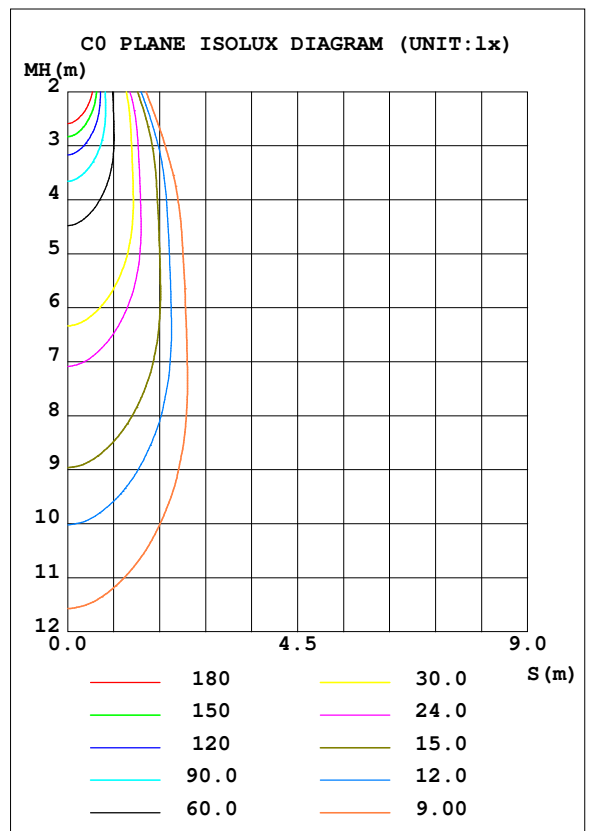


**LUMINAIRE PHOTOMETRIC TEST REPORT**

Test:U:230.16V I:0.0259A P:5.8837W PF:0.9864 Freq:49.99Hz Lamp Flux:726.015x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:0.470 Kg
SPEC.:5700K, LUMILED, BA-40°, CRI 70	DIM.: 83 x 116 x 110	SERIAL No.:INT/2024/05/89C
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 87.19 lm/W
MODEL	KL-7057	I <sub>max</sub> (cd)	1210	S/MH (C0/180)	0.53	
NOMINAL POWER (W)	6	LOR (%)	70.7	S/MH (C90/270)	0.57	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	513.03	η UP, DN (C0-180)	0.0, 34.1	
NOMINAL FLUX (lm)	726.015	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 36.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE (V)	230	η down (%)	70.7	CIBSE SHR MAX	0.55	

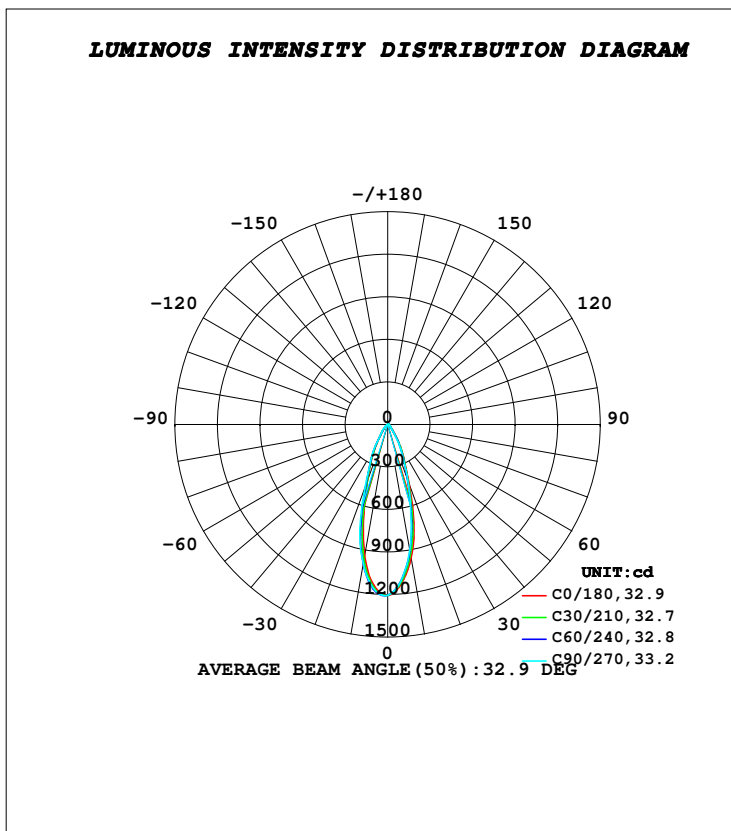

**C Range: 0 - 360DEG**  
**C Interval: 10.0DEG**  
**Test Speed: HIGH**  
**Temperature: 25.7DEG**  
**Operators: K-LITE**  
**Test Date: 24 July 2024**

**γ Range: 0 - 90DEG**  
**γ Interval: 1.0DEG**  
**Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417**  
**Humidity: 43.1%**  
**Test Distance: 2.001m [K=1.0000]**  
**Remarks:**

**APPLICABLE ID - KL-7052**