K-LiTE

Form-17

Power :	5W/10W	10W/20W	15W/30W	20W/40W
Length :	510mm	1010mm	1510mm	2010mm

Features


- Small form factor
- CRI Ra>90
- RGBW addressable LED strips : 100mm / Pixel
- SDCM ≤ 3
- L80 / B10 @ 60,000 Hrs
- For ready use with IP67 connectors

Options

DALI | CASAMBI | DMX




Mono colour



RGBW

Dimension in mm

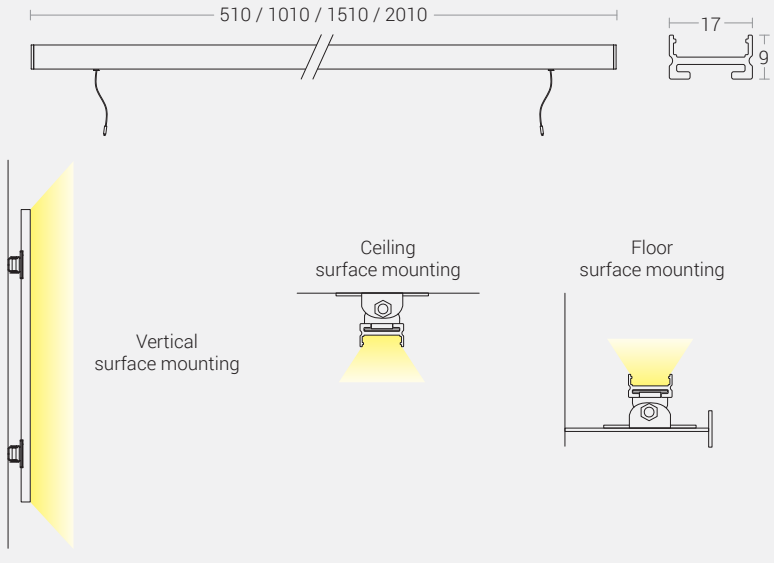


Housing Colour

High-quality Anodised Aluminium




Accessories



Adjustable Wall Clamp
Recommended to use every 500mm

Description	Dimension (mm)
Adjustable Wall Clamp	36 x 15 x 16

Light Distribution refer online





Technical Specifications

Light Source

Light Source	: LED
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K RGBW / RGBW Pixel (Special colours on request)

General

Driver Non-Integral	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU (IP67)

Optical

Tilt	: Fixed
Optical Beam Angle	: 120° (pixelated)
Diffuser Material	: Polyurethane Encapsulation

Physical

Body	: Extruded Aluminium with Translucent Endcaps / Clear Endcaps
Mounting	: Surface / Tiltable
Finish	: Anodized Aluminium

Specification

Power (W/m)	10W/m	20W/m
Max.length (m)	2 mts	2 mts
Max.serial run length (m)	5 mts	3 mts
Max.ambient temp.(Ta_{max})	50°C	45°C

IP67 | IK07 | UV SHIELD | LM80 COMPLIANT | SALT WATER RESISTANT | 24Vdc

Ordering Guide

Surface - Mono

ID	Wattage	Dimension (mm)
23265	5W	510 x 17 x 9
23265	10W	1010 x 17 x 9
23265	15W	1510 x 17 x 9
23265	20W	2010 x 17 x 9

Surface - RGBW / RGBW Pixel

ID	Wattage	Dimension (mm)
23265	10W	510 x 17 x 9
23265	20W	1010 x 17 x 9
23265	30W	1510 x 17 x 9
23265	40W	2010 x 17 x 9