K-LiTE

Form-26

Power :	10W	20W	30W	40W
Length :	515mm	1015mm	1515mm	2015mm




Features


- CRI Ra>90
- RGBW addressable LED strips : 100mm / Pixel
- SDCM ≤ 3
- L80 / B10 @ 60,000 Hrs
- For ready use with IP67 connectors
- Mounting tray for better cable management with slide fit system.

Options

DALI 2 | CASAMBI | DMX

Dimension in mm

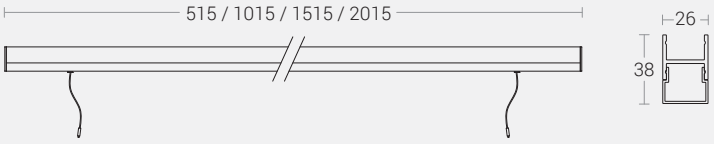

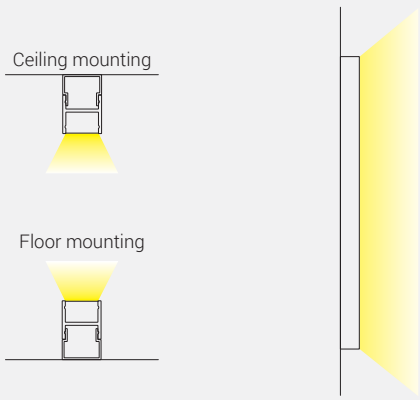


Housing Colour

High-quality Anodised Aluminium



Light Distribution refer online

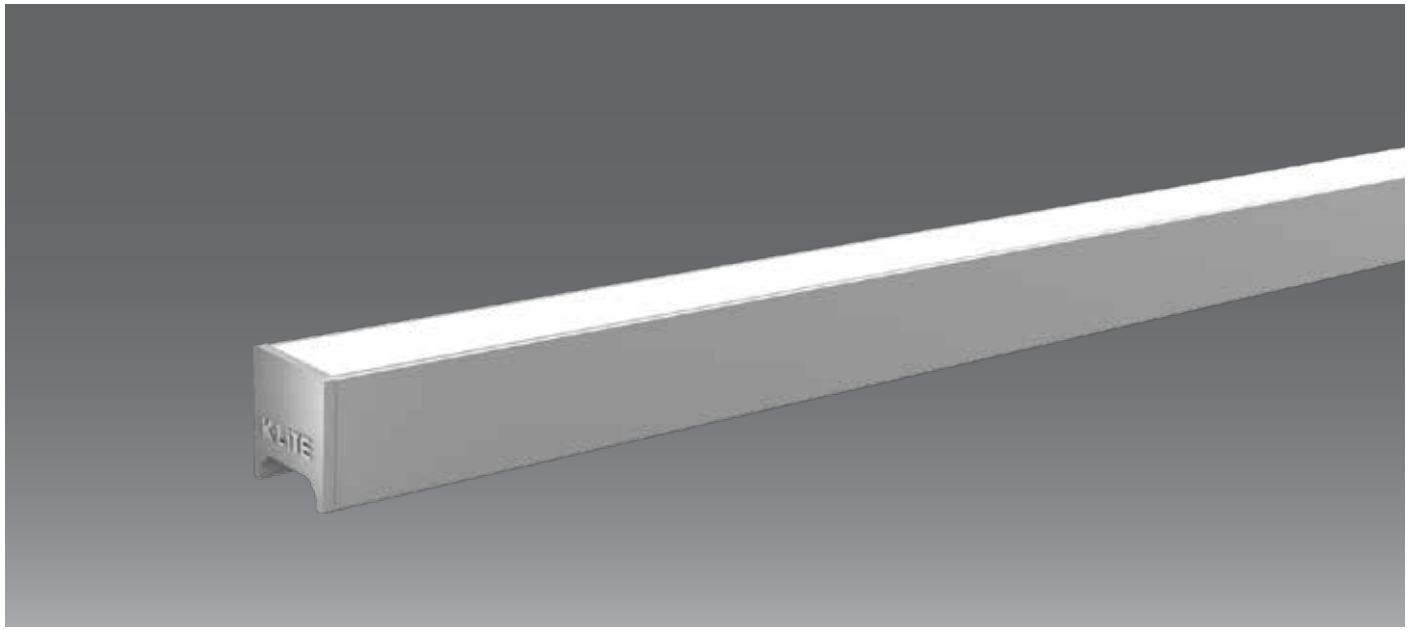

Technical Specifications

Light Source

Light Source	: LED
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K RGBW / RGBW Pixel (Special colours on request)

General

Driver	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU (IP67)

Optical

Tilt	: Fixed
Optical Beam Angle	: 120° (Diffused)
Diffuser Material	: Translucent Polyurethane Encapsulation

Physical

Body	: Extruded Aluminium
Mounting	: Surface
Finish	: Anodized Aluminium

Specification

Power (W/m)	10W/m	20W/m
Max.length (m)	2 mts	2 mts
Max.serial run length (m)	5 mts	3 mts
Max.ambient temp.(Ta_{max})	50°C	45°C



Ordering Guide

Surface - Direct

ID	Wattage	Dimension (mm)
23245	10W	515 x 26 x 38
23245	20W	1015 x 26 x 38
23245	30W	1515 x 26 x 38
23245	40W	2015 x 26 x 38