K-LITE

Power Grazer-21

Power :	10W	20W	30W	40W
Length :	515mm	1015mm	1515mm	2015mm

Features

- CRI Ra>90
- Perfectly solution for wall grazing
- SDCM ≤ 3
- L80 / B10 @ 60,000 Hrs
- For ready use with IP67 connectors


Options

DALI 2 | CASAMBI




Mono colour


Dimension in mm

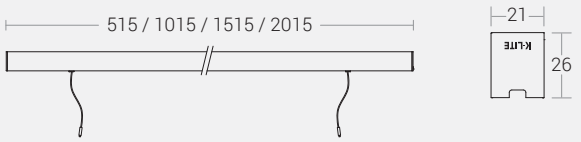

Wall Mounting

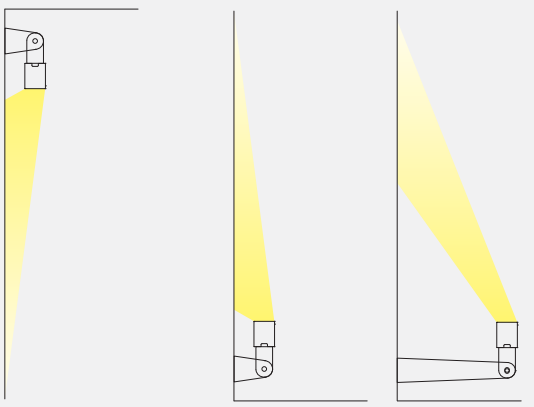

Suspension Mounting




Housing Colour


High-quality Anodised Aluminium



Accessories



Adjustable wall clamp




Suspension kit

ID	Description	Dimension (mm)
68293	Suspension kit set	1m

Adjustable stainless steel suspension kit (1 metre) available on request / Adjustable wall clamp recommended to use for every 900mm.

Light Distribution refer online

Power Grazer-21

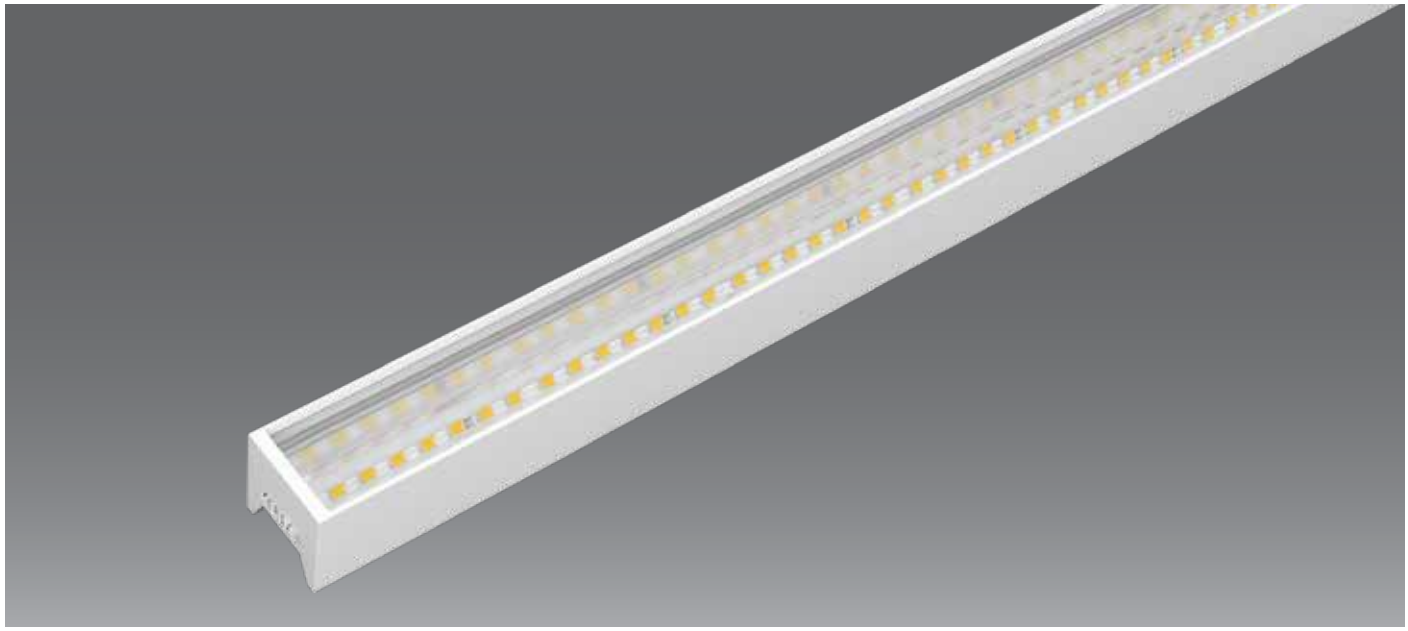

Technical Specifications

Light Source

Light Source	: LED
CRI (Ra)	: >90
LED Colour Temperature	: Amber / 2700K / 3000K / 4000K

General

Driver	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU (IP67)

Optical

Efficiency (lm/w)	: 20W : >60
Tilt	: Fixed
Optical Beam Angle	: 30°
Luminaire Efficiency	: Upto 70 lm/W
Diffuser Material	: Polyurethane Encapsulation

Physical

Body	: Extruded Aluminium with Translucent Endcaps
Mounting	: Surface / Tiltable / Suspension
Finish	: Anodized Aluminium

Specification

Power (W/m)	20W/m	40W/m
Max.length (m)	2 mts	2 mts
Max.serial run length (m)	3 mts	2 mts
Max.ambient temp.(Ta_{max})	45°C	45°C

IP67 | IK07 | LM80 COMPLIANT | SALT WATER RESISTANT | 24Vdc

Ordering Guide

Surface - Direct

ID	Wattage	Dimension (mm)
23248	10W	515 x 21 x 26
23248	20W	1015 x 21 x 26
23248	30W	1515 x 21 x 26
23248	40W	2015 x 21 x 26