

"Navya Mini" wall luminaire, is an innovative design options to provide visual integration with the environment. Aesthetically shaped wall mounted luminaire with fully shielded light source for striking light effects. Product offered asymmetrical light distribution.

Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- Polycarbonate optical lens.
- Luminaire integrated with 30W LED.
- Pressure die cast aluminium mounting base for easy installation onto the wall.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24367-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits


- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Low maintenance cost.
- Sustainable LED technology offers durability and optimal light output with low power consumption.


Area of Application

Retail Sector, Residential, Building facade, Commercial centres, Internal passages, Pathways.

Available Finish

Pure polyester powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

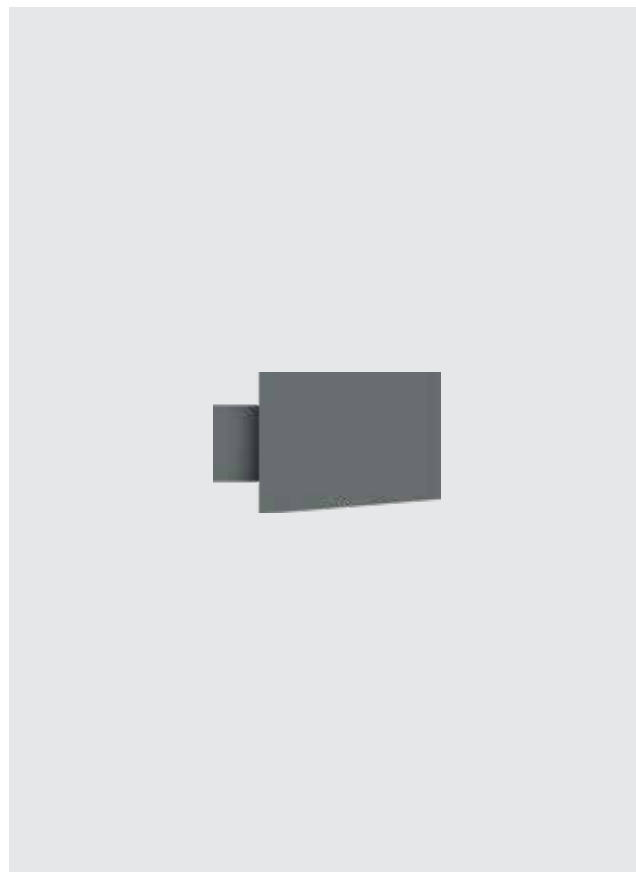

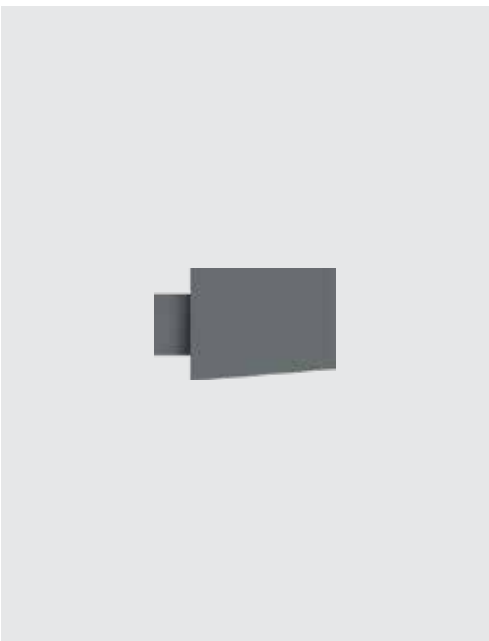

Technical Specifications

General

ID	: 24367
System Wattage	: 30W
Driver Integral	: Constant Current
Operating Voltage	: 110-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Wall - Surface
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source



Light Source	: NICHIA
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Light Distribution	: Type III Medium
--------------------	-------------------



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

"Navya" wall luminaire, is an innovative design options to provide visual integration with the environment. Aesthetically shaped wall mounted luminaire with fully shielded light source for striking light effects. Product offered asymmetrical light distribution.

Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- Polycarbonate optical lens.
- Luminaire integrated with 60W LED.
- Pressure die cast aluminium mounting base for easy installation onto the wall.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24368-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits


- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Low maintenance cost.
- Sustainable LED technology offers durability and optimal light output with low power consumption.


Area of Application

Retail Sector, Residential, Building facade, Commercial centres, Internal passages, Pathways.

Available Finish

Pure polyester powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

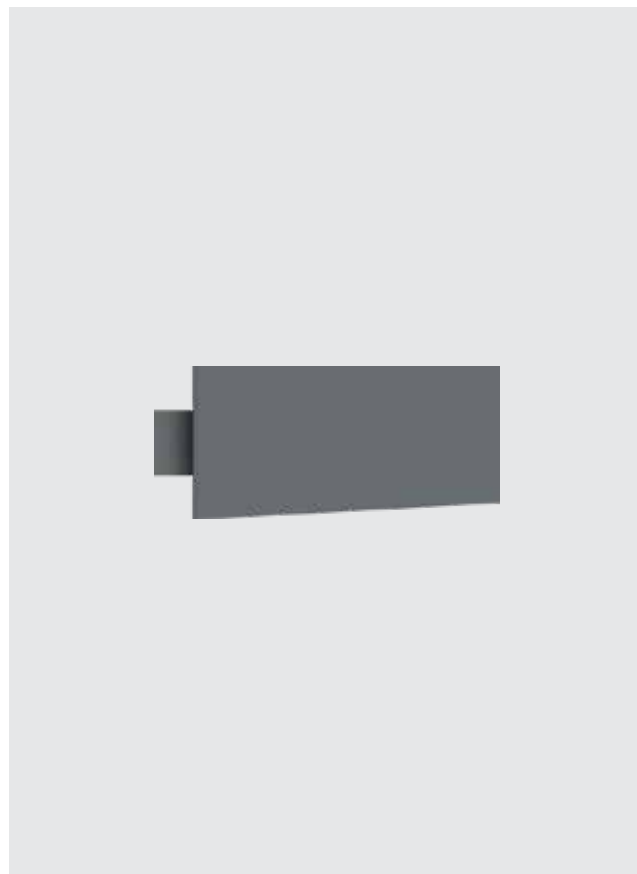

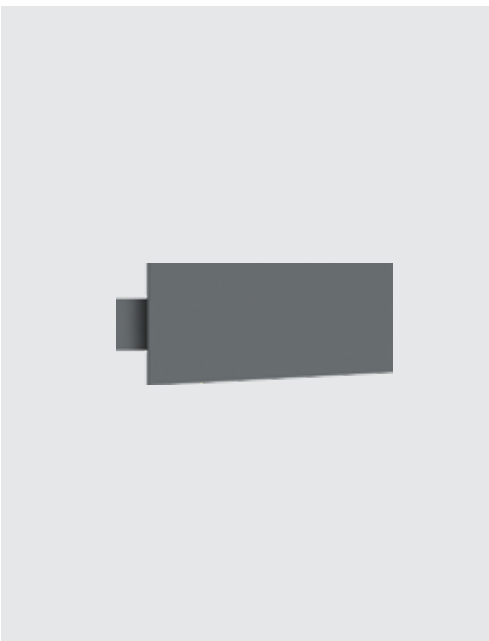

Technical Specifications

General

ID	: 24368
System Wattage	: 60W
Driver Integral	: Constant Current
Operating Voltage	: 110-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Wall - Surface
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source



Light Source	: NICHIA
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Light Distribution	: Type III Medium
--------------------	-------------------



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in