

Surface mounted range of LED wall light is perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered asymmetrical light distribution.

Product Description

- Luminaire body made of extruded aluminium alloy (grade 6063) with die cast aluminium components and non corrosive SS fasteners.
- Clear toughened glass.
- Luminaire integrated with 30W LED.
- Die Cast aluminium base for easy installation onto the wall.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24370-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Low maintenance cost.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Building facade, Commercial centres, Internal Passages, Walkways, Structures, Pathways in residential buildings & Office Complex.


Available Finish


Pure polyester powder coated

RAL 9004 Black

RAL 7016 Anthracite grey

Graphite grey

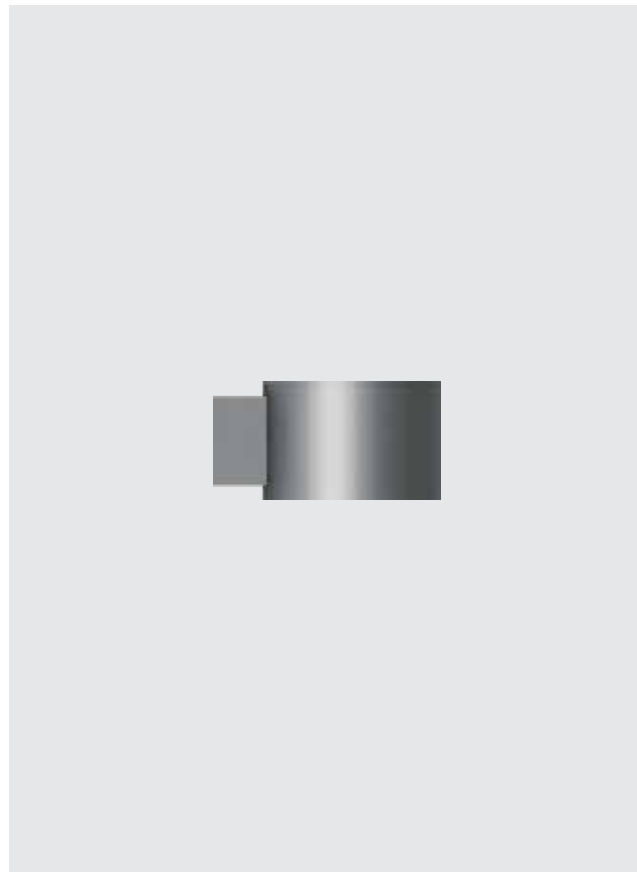

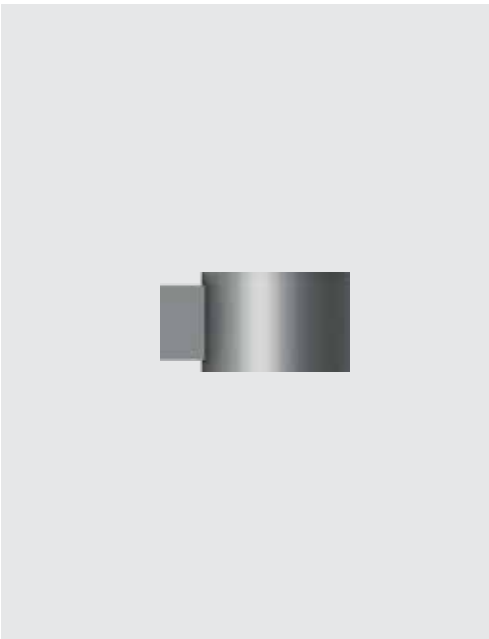

Technical Specifications

General

ID	: 24370
System Wattage	: 30W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Wall - Surface
Finish	: Powder coated
	RAL 9004 Black
	RAL 7016 Anthracite grey
	Graphite grey

Light Source



Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K
	5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Type II, Type III, Type IV
--------------------	------------------------------



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

Surface mounted range of LED wall light is perfect fit for varied outdoor lighting applications. Designed to illuminate the wall and surface in front of wall and for light accents on vertical surfaces. Aesthetically designed sturdy construction ensures a long life against all weather condition, maintaining initial performances through the lifetime of the installation. Product offered asymmetrical light distribution.

Product Description

- Luminaire made of pressure die cast aluminium with non corrosive SS fasteners.
- Clear toughened glass..
- Luminaire integrated with 50W LED.
- Die Cast aluminium base for easy installation onto the wall.
- Surface mounting on wall using hardware after connecting to the power supply.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24371-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Low maintenance cost.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Building facade, Commercial centres, Passages, Walkways, Structures, Pathways in residential buildings & Office Complex.


Available Finish


Pure polyester powder coated

RAL 9004 Black

RAL 7016 Anthracite grey

Graphite grey

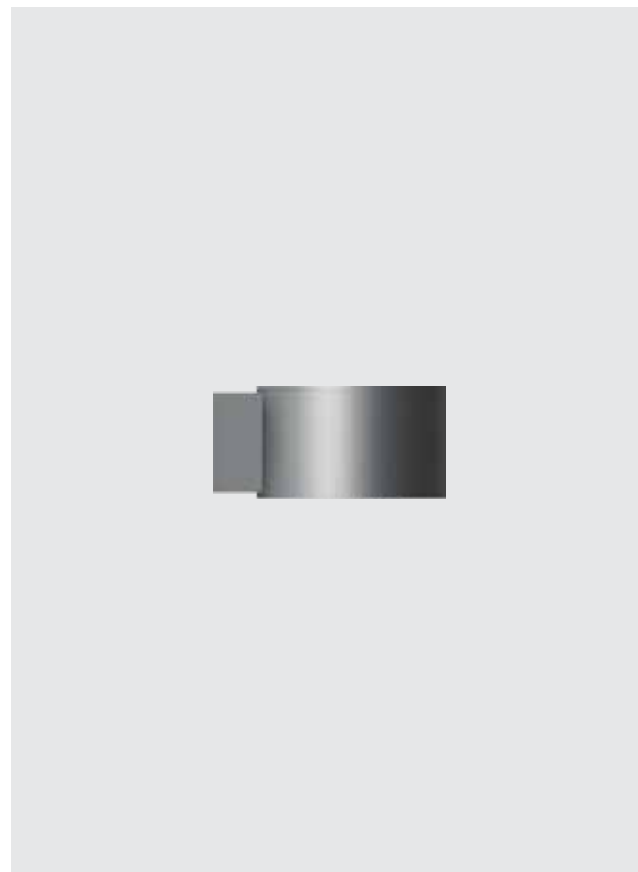

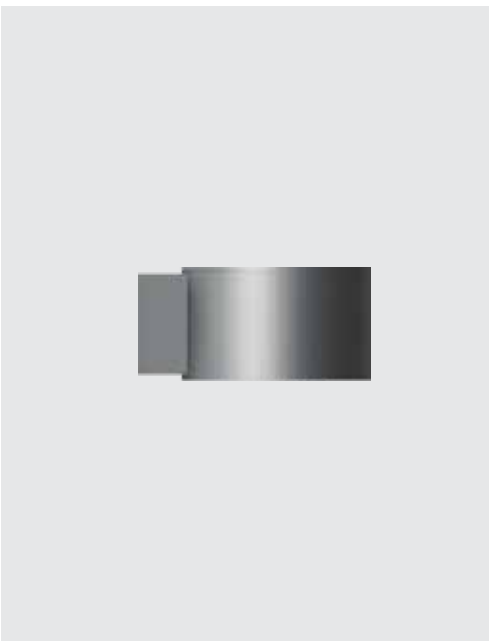

Technical Specifications

General

ID	: 24371
System Wattage	: 50W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Wall - Surface
Finish	: Powder coated
	RAL 9004 Black
	RAL 7016 Anthracite grey
	Graphite grey

Light Source



Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K, 3000K / 4000K
	5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >88%

Optical Performance

Optical Distribution	: Type II, Type III, Type IV
----------------------	------------------------------



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in