
K-LITE

Power Grazer-32

Power :	10W	20W	30W	40W
Length :	515mm	1015mm	1515mm	2015mm





RGBW / RGBW Pixel

Features

- Perfectly solution for wall grazing
- RGBW addressable LED strips : 100mm / Pixel
- SDCM ≤ 3
- L80 / B10 @ 60,000 Hrs
- For ready use with IP67 connectors

Dimension in mm

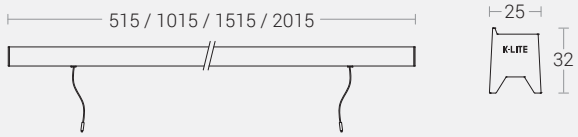

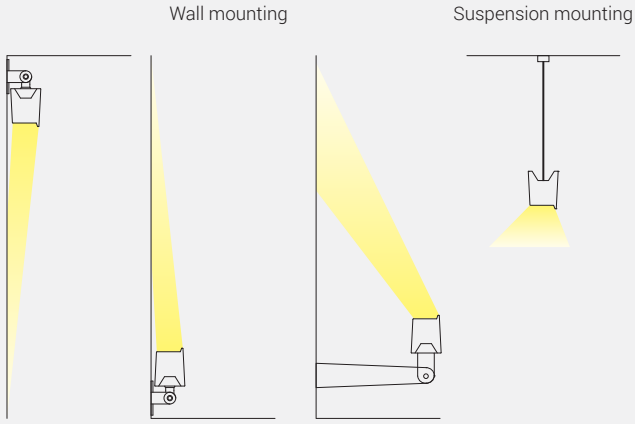


Options

DALI 2 | CASAMBI | DMX

Housing Colour

High-quality Anodised Aluminium

Accessories



Adjustable wall clamp




Suspension kit

Adjustable stainless steel suspension kit (1 metre) available on request / Adjustable wall clamp recommended to use for every 900mm.

Light Distribution refer online

Power Grazer-32

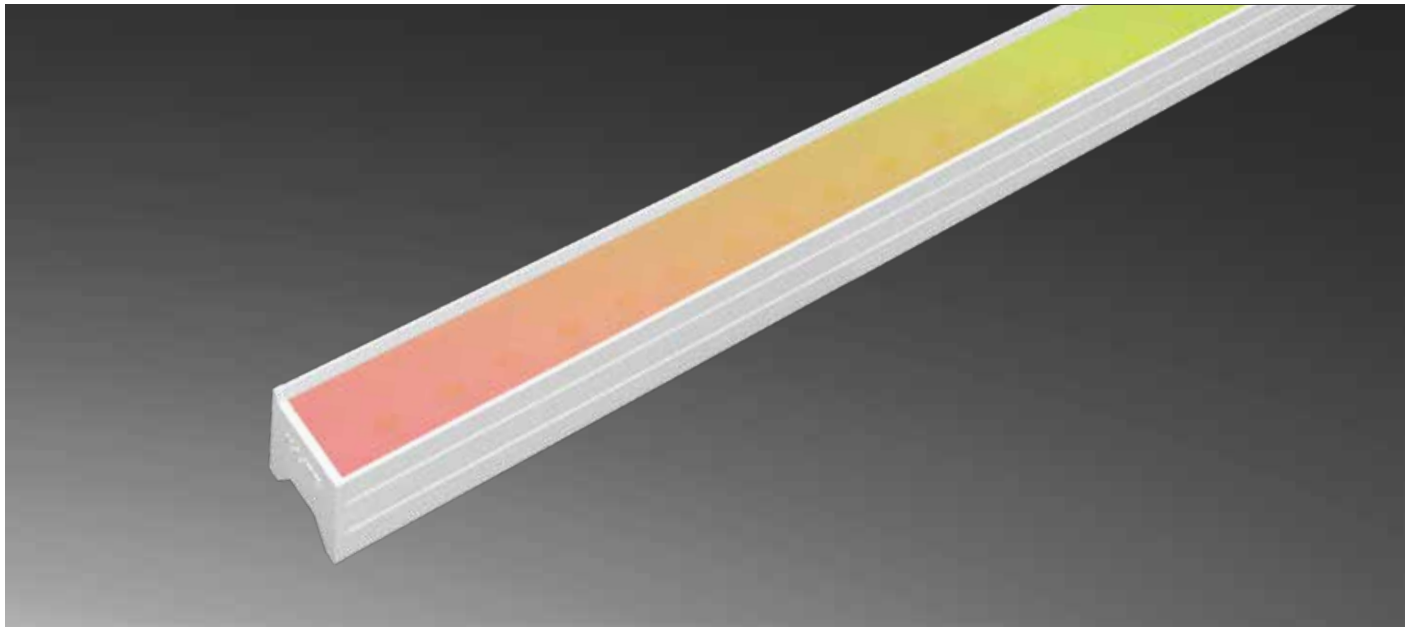

Technical Specifications

Light Source

Light Source	: LUMILEDS
LED Colour Temperature	: RGBW / RGBW Pixel

General

Driver	: Constant Voltage
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU (IP67)

Optical

Efficiency (lm/w)	: 40W : >45 (RGBW)
Tilt	: Fixed
Diffuser Material	: Clear Polyurethane Encapsulation

Physical

Body	: Extruded Aluminium with Translucent Endcaps
Mounting	: Tiltable
Finish	: Anodized Aluminium

Specification

Power (W/m)	20W/m	40W/m
Max.length (m)	2 mts	2 mts
Max.serial run length (m)	3 mts	2 mts
Max.ambient temp.(Ta_{max})	45°C	45°C

IP67 IK07 LM80 COMPLIANT SALT WATER RESISTANT 24Vdc

Ordering Guide

Surface - Direct - RGBW

ID	Wattage	Dimension (mm)
23560	10W	515 x 25 x 32
23560	20W	1015 x 25 x 32
23560	30W	1515 x 25 x 32
23560	40W	2015 x 25 x 32