

K-LITE

Mini Grazer

Power : Upto 10W Upto 20W Upto 30W Upto 40W
Length : 520mm 1020mm 1520mm 2020mm

Upto
70
lm/w

Features


- Lumileds LED's
- CRI Ra>80 (>90 On Request)
- L80 / B10 @ 60,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options



CASAMBI

Optical Beam Angle




Installation

Ceiling / Floor mounting




Description
Mounting clips
Recommended to use every
500mm.

Pendant



Description
Adjustable stainless steel
suspension kit (1metre)
available on request.

Wall mounted adjustable




Mounting accessories
68400
Adjustable wall clamp mount ($\pm 60^\circ$)

K-LITE


Mono Colour



Dimension
in mm



Application Idea

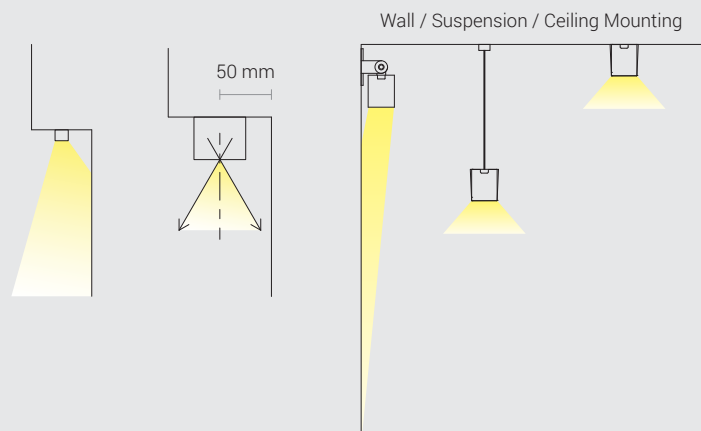



Housing Colour



Extruded aluminium with powder coated finish in
RAL9004 Black I RAL9016 Traffic White

Light
Distribution

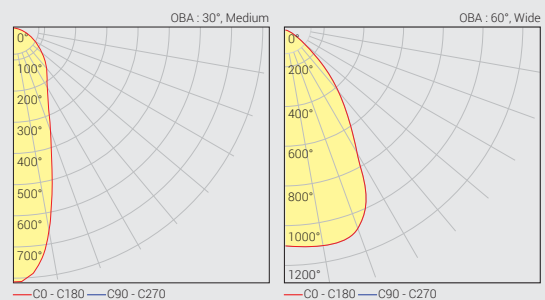

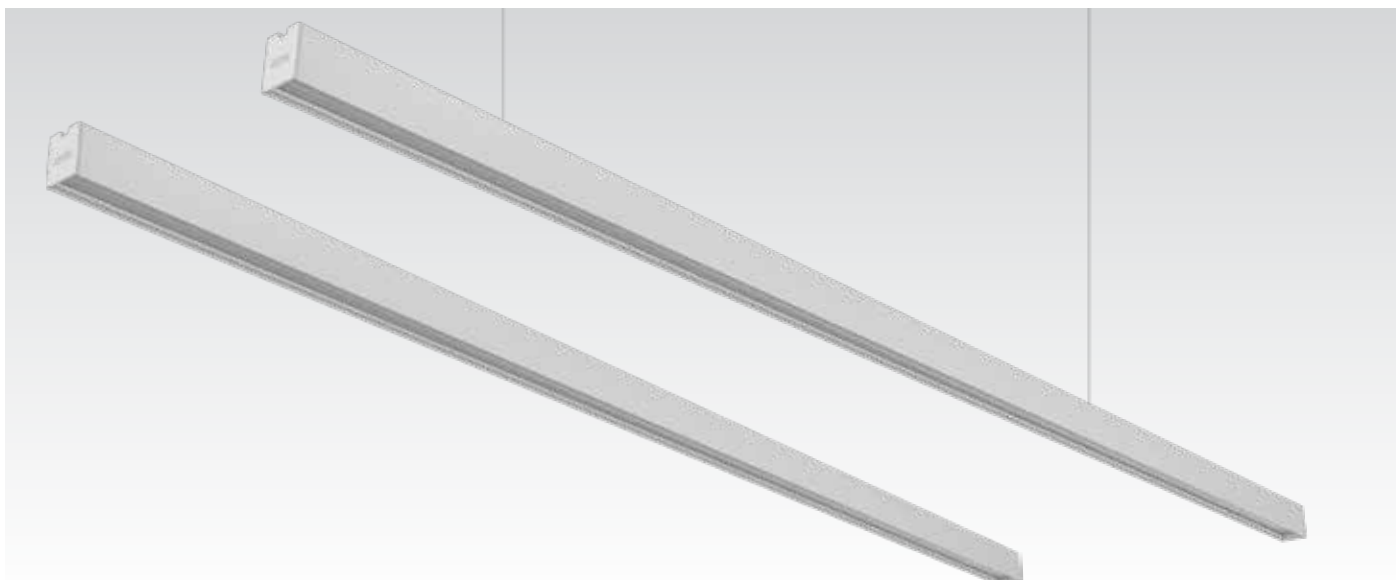

Technical Specifications

General

Driver	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU

Light Source

Light Source	: Lumileds
CRI (Ra)	: >80 (>90 on request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Optical Beam Angle	: 30° / 60°
Luminaire Efficiency	: Upto 70 lm/W / Upto 67 lm/W
Diffuser Material	: Clear PMMA extruded lens

Physical

Body	: Extruded Aluminium with Translucent Endcaps
Mounting	: Surface / Pendant
Finish	: RAL 9004 Black RAL 9016 Traffic White

Specification

Power (W/m)	: 20W/m
Max.length (m)	: 2 mts



Ordering Guide

Pendant - Direct / Surface

ID	Wattage	Dimension (mm)
22828	Upto 10W	520 x 21 x 26
22828	Upto 20W	1020 x 21x 26
22828	Upto 30W	1520 x 21x 26
22828	Upto 40W	2020 x 21x 26

Note : Luminaire operating voltage is 24Vdc, to be ordered with suitable power supply, controller and accessories.