


K-LITE

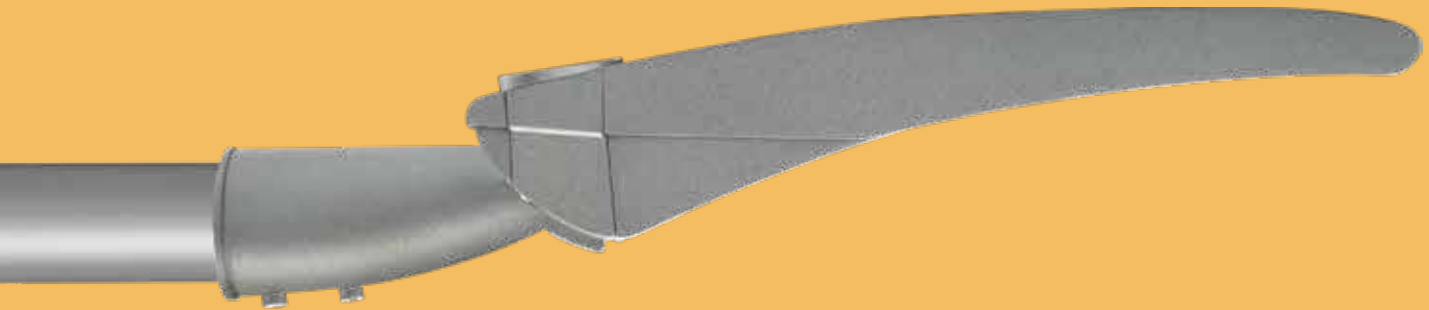

WACO PRO

INFRASTRUCTURE LIGHTING

60 - 300W in one Waco family

Sustainable and
recyclable materials.
Die-cast aluminium
(ADC12)

Modular LED engines
for a precise light
distribution

Seperate IP66 optical compartment
sealed by clear toughened glass

Mounting piece
inclination adjustment
system on-site

Seperate IP66 driver
compartment

Tool-Less Maintenance

Side & Pole Top Mounting





WACO PRO

Elegance . Functionally

Designed for Urban Environment, Waco Pro range offers optimised photometrical performance with a minimum total cost of ownership. It offers towns and cities the ideal tool to improve lighting levels, generate energy saving and reduce their ecological footprint.

Waco Pro comes in four sizes and offers flexible combinations of LED modules, a choice of currents and dimming options to further maximise energy savings and provide the most cost-effective solution.



WACO PRO MINI

ID : 24328
Luminaire Power : 60W
Wattage Range : 40W - 60W
Dimensions : 555 x 210 x 143



WACO PRO MIDI

ID : 24306
Luminaire Power : 120W
Wattage Range : 80W - 120W
Dimensions : 645 x 257 x 147



WACO PRO MAXI

ID : 24307
Luminaire Power : 180W
Wattage Range : 150W - 200W
Dimensions : 790 x 305 x 147



WACO PRO MEGA

ID : 24308
Luminaire Power : 240W
Wattage Range : 200W - 300W
Dimensions : 890 x 361 x 163

Waco Pro encompasses design, visual comfort, performance, energy savings in a single street lighting system. Waco Pro comes in four different sizes, together with an adjustable inclination joint that guarantees maximum flexibility.

Product Description

- Housing and front frame made of die-cast aluminium (ADC12) featuring high strength and anti corrosion.
- Separate optical & driver compartment for tool less maintenance.
- Clear toughened glass diffuser.
- High light transmittance optical lens for various applications.
- Suitable for mounting on to 60 mm dia pipe at lateral (side entry) and vertical (top mount) with adjustable angle -15° to +15°.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 70 (>80 On Request)
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-24328-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Functionally versatile, stable with sound engineering.
- Corrosion resistant and maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Controls

- Dimmable options : Dali / 1-10V / PWM (On Request)
- Smart control management system (On Request)

Area of Application

Roads and highways, Parking lots and large areas, Roundabouts, Pedestrian and bicycle paths, Pedestrian crossing.

Available Finish

Pure polyester powder coated




RAL 9004 Black

RAL 7016 Anthracite grey

Graphite grey

* (On Request) depends upon the availability and validation of drivers and other accessories



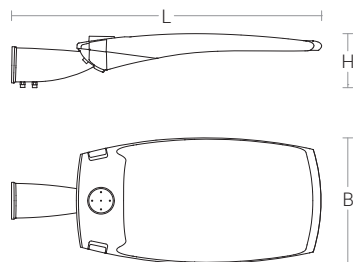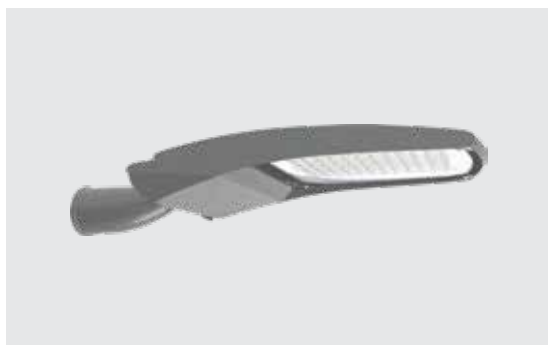


Bracket with a tilting system from -15° to +15°

Product Code	KL-24328	KL-24306	KL-24307	KL-24308
Input Wattage	60W	120W	180W	240W
Wattage Range	40W - 60W	80W - 120W	150W - 200W	200W - 300W
Installation Pipe Diameter	Ø60mm			
Color Temperature	2700K / 3000K / 4000K / 5700K			
Input Voltage	AC90~305V			
Frequency Range	50/60Hz			
Power Factor	PF>0.97			
Surge Protection	6KV (Additional Surge Protection on Request)			
Color rendering index (Ra)	≥70 (>80 On Request)			
Operating Temperature	-15°C~+50°C			
LED Lifetime	>60000hrs			
Protectin Grade	IP66			
Protection level	IK09			
Installation Height	3-6m	6-8m	8-10m	10-14m
Dimension (L x B x H)	555 x 210 x 143	645 x 257 x 147	790 x 305 x 147	890 x 361 x 163

Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 150lm/W.

Luminaire Use

According to the Lamp Post Height

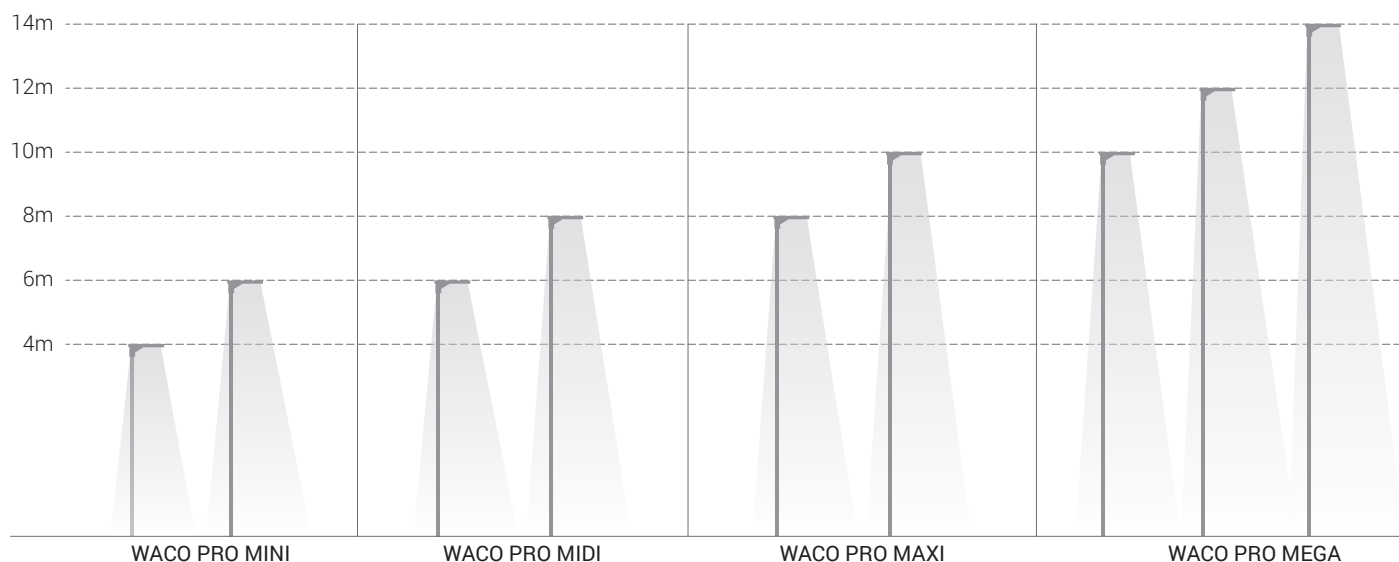



Technical Specifications

General

ID	: 24328
System Wattage	: 60W
Driver Integral	: Constant Current
Operating Voltage	: 90-305Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast aluminium (ADC12)
Diffuser	: Clear toughened glass
Mounting	: Suitable for mounting Horizontal & Vertical on 60 mm OD pipe

Finish

: Powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

Light Source


CRI (Ra)	: ≥70 (>80 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV (Additional Surge Protection on Request)
Efficiency	: >85%
Dimmable options	: Dali / 1-10V / PWM (On Request)
Control	: Smart control management system (On Request)


Optical Performance


Colour Temperature	: 5700K
Luminous flux	: 9186 lm
Optical Distribution	: Type II (Type III, Type IV - On Request).
Light distribution & IES files - Please refer Online	

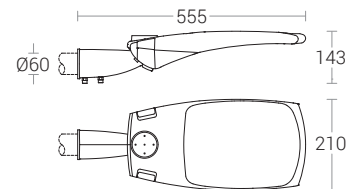

Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 150lm/W.

Photometric Data



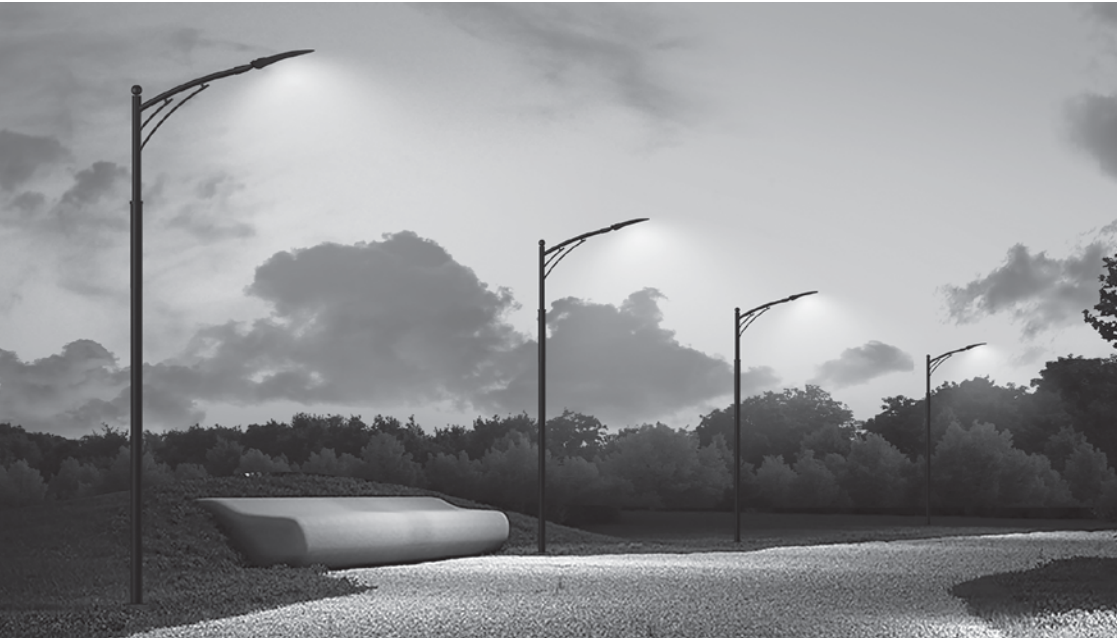

Technical Specifications

General

ID	: 24306
System Wattage	: 120W
Driver Integral	: Constant Current
Operating Voltage	: 90-305Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast aluminium (ADC12)
Diffuser	: Clear toughened glass
Mounting	: Suitable for mounting Horizontal & Vertical on 60 mm OD pipe

Finish

: Powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

Light Source


CRI (Ra)	: ≥70 (>80 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV (Additional Surge Protection on Request)
Efficiency	: >85%
Dimmable options	: Dali / 1-10V / PWM (On Request)
Control	: Smart control management system (On Request)


Optical Performance

Colour Temperature	: 5700K
Luminous flux	: 18589 lm
Optical Distribution	: Type II (Type III, Type IV - On Request).
Light distribution & IES files	- Please refer Online

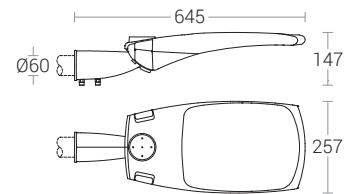

- Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 150lm/W.

Photometric Data





Technical Specifications

General

ID	: 24307
System Wattage	: 180W
Driver Integral	: Constant Current
Operating Voltage	: 90-305Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast aluminium (ADC12)
Diffuser	: Clear toughened glass
Mounting	: Suitable for mounting Horizontal & Vertical on 60 mm OD pipe

Finish

: Powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

Light Source


CRI (Ra)	: ≥70 (>80 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV (Additional Surge Protection on Request)
Efficiency	: >85%
Dimmable options	: Dali / 1-10V / PWM (On Request)
Control	: Smart control management system (On Request)

Optical Performance

Optical Distribution	: Type II (Type III, Type IV - On Request).
Light distribution & IES files - Please refer Online	

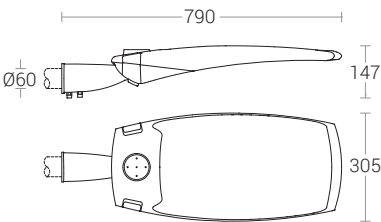

Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 150lm/W.



Technical Specifications

General

ID	: 24308
System Wattage	: 240W
Driver Integral	: Constant Current
Operating Voltage	: 90-305Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast aluminium (ADC12)
Diffuser	: Clear toughened glass
Mounting	: Suitable for mounting Horizontal & Vertical on 60 mm OD pipe

Finish

: Powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

Light Source


CRI (Ra)	: ≥70 (>80 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6kV (Additional Surge Protection on Request)
Efficiency	: >85%
Dimmable options	: Dali / 1-10V / PWM (On Request)
Control	: Smart control management system (On Request)

Optical Performance

Optical Distribution	: Type II (Type III, Type IV - On Request).
Light distribution & IES files - Please refer Online	

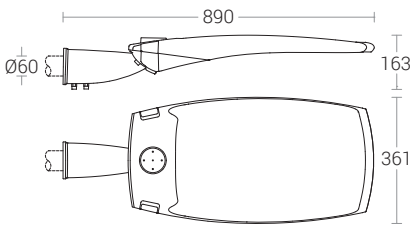

Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 150lm/W.

EFFICIENT AND SUSTAINABLE

The Waco Pro range offers optimised photometrical performance with a minimum total cost of ownership. It offers towns and cities the ideal tool to improve lighting levels, generate energy saving and reduce their ecological footprint.

Waco Pro comes in four sizes and offers flexible combinations of LED modules, a choice of currents and dimming options to further maximise energy savings and provide the most cost-effective solution.

A rear bracket version of the Waco Pro luminaire is available so that streets, side streets and large pavements can be lit using the same luminaire design.

ADVANTAGES

- Sustainable and recyclable materials. Die-cast aluminium (ADC12).
- Modular LED engines for a precise light distribution.
- Mounting piece inclination adjustment system on-site.
- Seperate IP66 optical compartment sealed by clear toughened glass.
- Seperate IP66 driver compartment.
- Tool-Less Maintenance.
- 60 - 300W in one Waco family.
- Side & Pole Top Mounting.

MAXIMUM ENERGY SAVINGS

It is equipped with LEDs and various dimming and remote management options for a dramatic reduction in energy consumption.

PERFORMANCE AND FLEXIBILITY

The Waco Pro luminaires are equipped with photometric engines composed of modular quantities of LEDs so that they can offer a wide range of lumen packages. They can also be equipped with a variety of drivers and dimming options.

The Waco Pro luminaires can be adjusted on-site for optimal photometric performance. This flexibility ensures that the light distributions are specifically adapted to the real needs of the area to be lit.

CONTROL OPTIONS


The follow dimming Options are possible for the Waco Pro street light luminaires


Dali / 1-10V / PWM

As an option, this luminaires can be equipped with a standard NEMA socket, enabling an easy access to the digital era of lighting with advanced lighting features that plan, monitor and control outdoor lighting networks.

INSTALLATION AND MAINTENANCE

The complete range is available with four different size adapted for post-top and side-entry mounting (Ø60mm). The inclination angle can be adjusted on-site for both post-top (-15 to +15°) and side-entry (-15 to -15°) mounting in 5° steps.

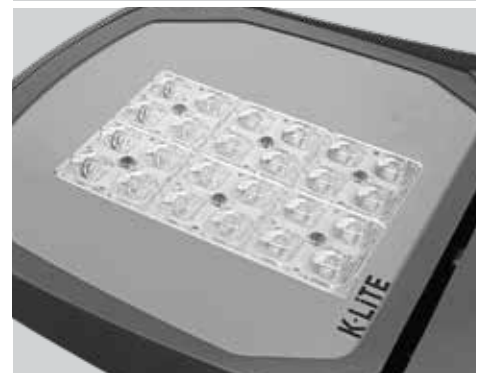

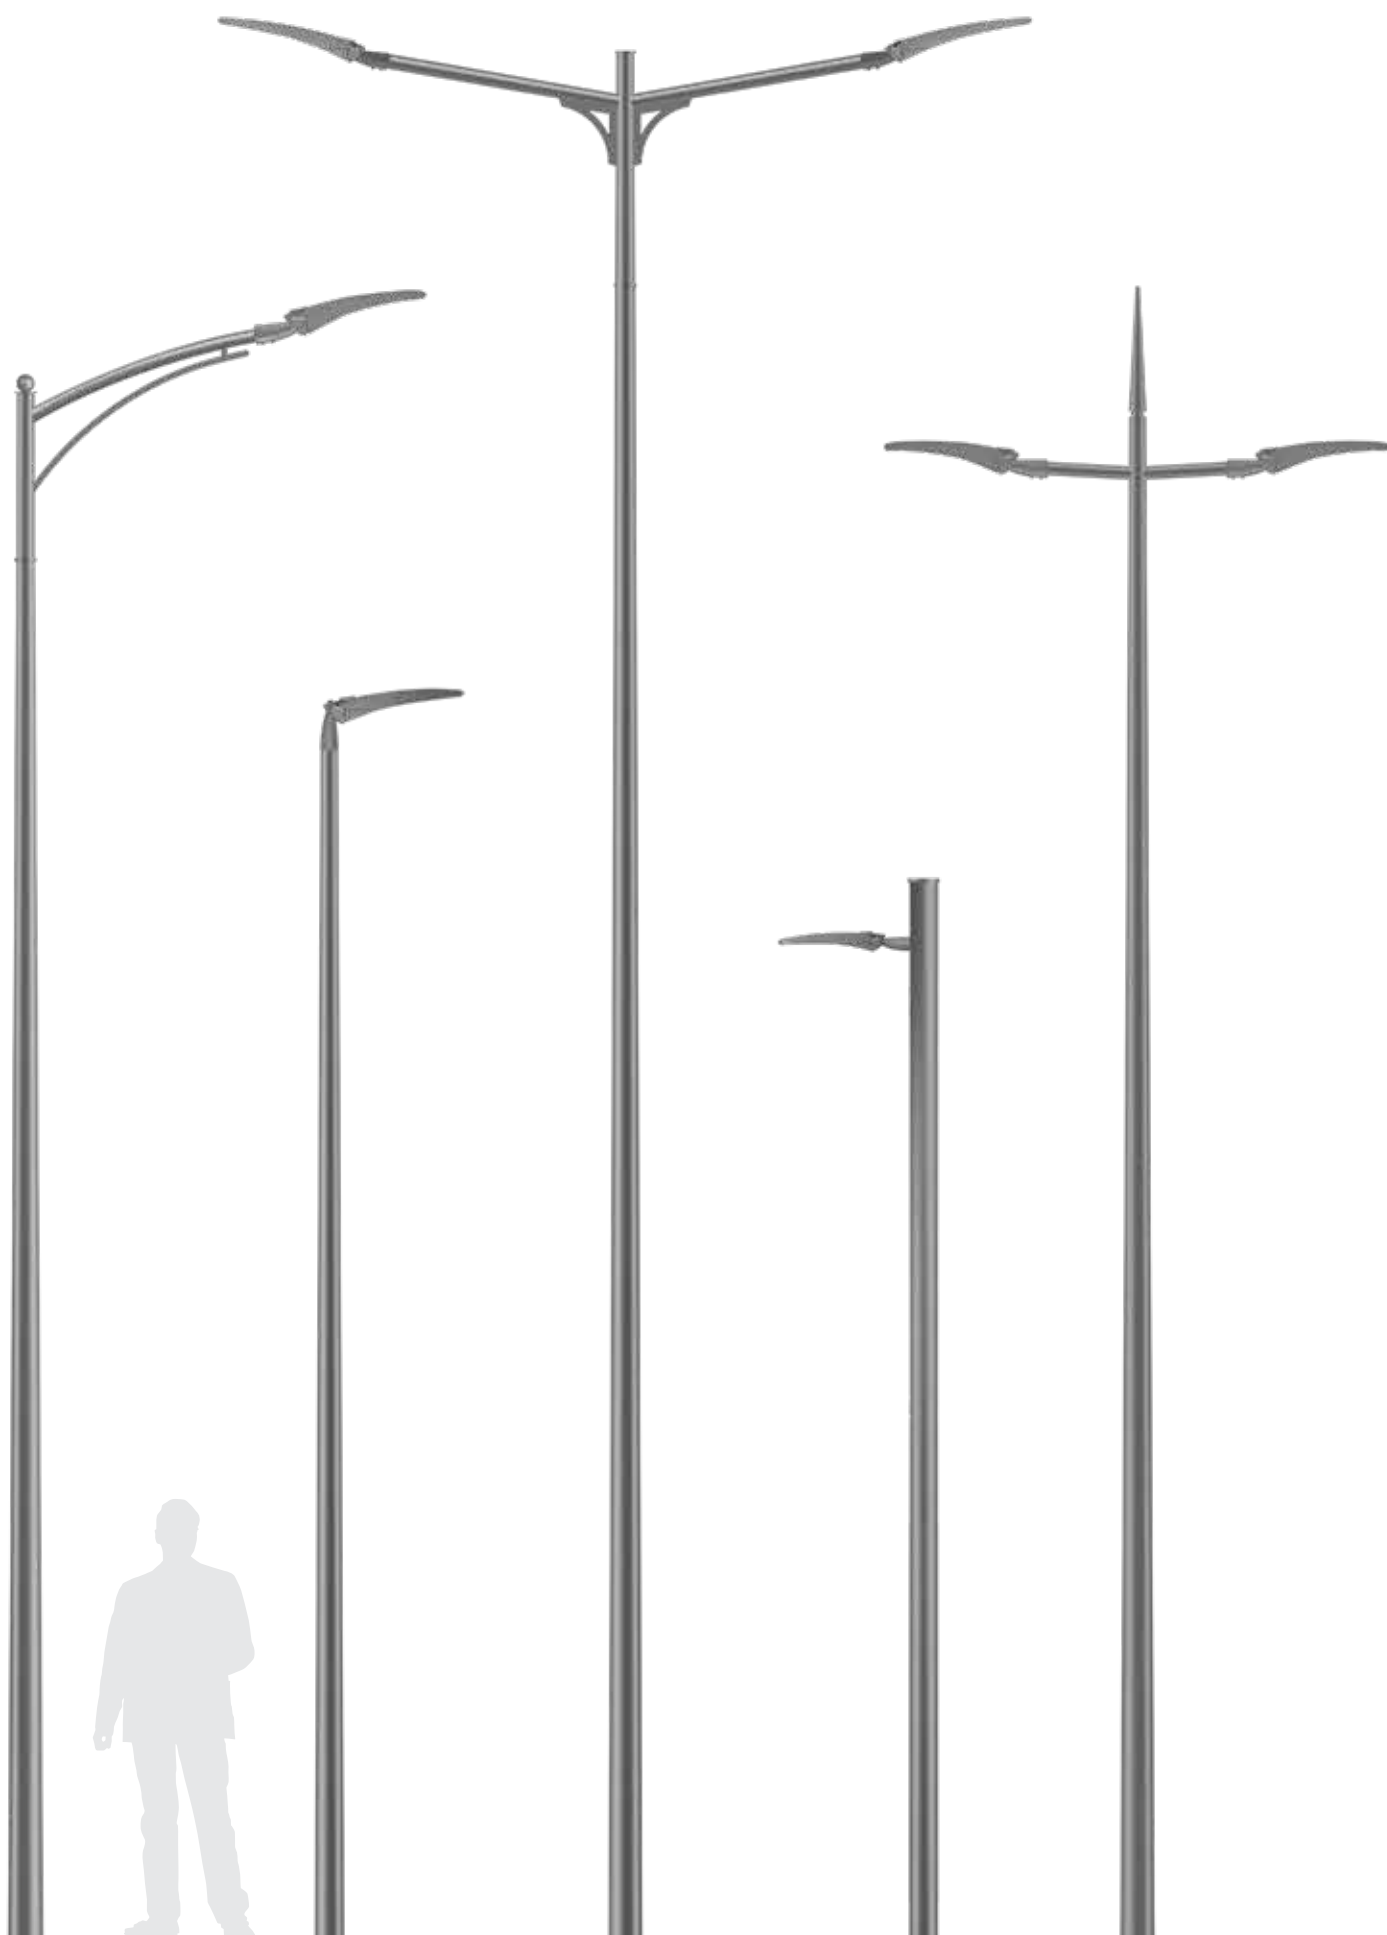



Technical Features

Fixing

- Suitable for post top or side mounting on Ø60mm OD pipe.
- Scale available on housing for mounting bracket and adjustable by (5° step).
- Adjustable angle -15° to +15°.

Materials

- Die-cast aluminium (ADC12)
- Clear Toughened glass
- Stainless steel fastners

Finish

- Pure polyester powder coated
RAL 9004 Black
RAL 7016 Anthracite grey
Graphite grey

Structure

- Die-cast aluminium housing, with a IP66 protection rating.
- Transparent extra-clear flat glass, 4mm thick
- Silicone gasket between frame and cover
- IK09 mechanical resistance


Electrical auxiliaries

- Can be supplied with programmable electroinic power supply for smart controls
- Automatic power cutoff switch when top cover is opened
- Wiring plate with space for any auxiliary remote control devices (Smart City Ready) and additional surge protection devices (SPD)

Power Supply

- Protected against short circuit, over-temperature and over-voltages upto 6KV (Additional Surge Protection on Request)
- Nema socket available on request

Light Distribution



TYPE II - ASYMMETRIC ROAD

Complete versatility of use thanks to street geometries that meet the requirements necessary for all applications presented.



K-LITE

K-LITE INDUSTRIES PVT.LTD

D-10, Ambattur Industrial Estate, Chennai - 600 058.

T : 26257710, 48591800, 48581950.

M: 95000 79797, 95000 85511

E : info@klite.in

W: www.klite.in

Unit II

23B,
SIDCO Industrial Estate,
Chennai - 600 098.

Unit V

Illumination Lab
G8, Ambattur Industrial Estate,
Chennai - 600 058.

Delhi Office - NCR

L-14/10, DLF City,
Phase - II, Gurgaon - 122002.
Haryana.

Unit III

179 & 180,
SIDCO Industrial Estate,
Chennai - 600 098.

Unit VI

Plot No.E29-E30-E31-E32,
Industrial Area, Phase-II,
Mandideep Tehsil,
Goharganj District-462046.
Raisen (MP).

Showroom

7/11, M.T.H. Road,
Chennai - 600 058.

Unit IV

22B,
SIDCO Industrial Estate,
Chennai - 600 098.

K-LITE EUROPE LTD London Showroom

271 Abbeydale Road,
London, HA0 1TW.
T : 0208 012 8393
E : info@klite.co.uk
W : www.klite.co.uk