

"Kayal" pathway luminaire, is an innovative design options to provide visual integration with the environment. High Brightness, LED Light source do not pose any environment risks. Designed for highest efficiency in terms of more lumens at reduced wattages contributing to a Greener World. Product offered asymmetrical light distribution.

Product Description

- Luminaire made of die cast aluminium with extruded aluminium pipe & non corrosive SS fasteners.
- Clear toughened glass.
- Luminaire integrated with 50W / 100W LED.
- Suitable for mounting on 76mm / 88.9mm OD pipe.
- Extruded aluminium mounting pipe for easy installation onto the pole.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : >70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-22572-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegance, Functionality.
- Environmental friendly, moisture proof, insect free.
- Corrosion resistant and Maintenance free.
- Quick installation and low assembly costs.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Illuminating parks, Gardens, Commercial complex, Smaller Roadways, Private driveways, Pathways in Residential buildings & office complex.


Available Finish

Pure polyester powder coated

RAL 9004 Black

RAL 7016 Anthracite grey

Graphite grey

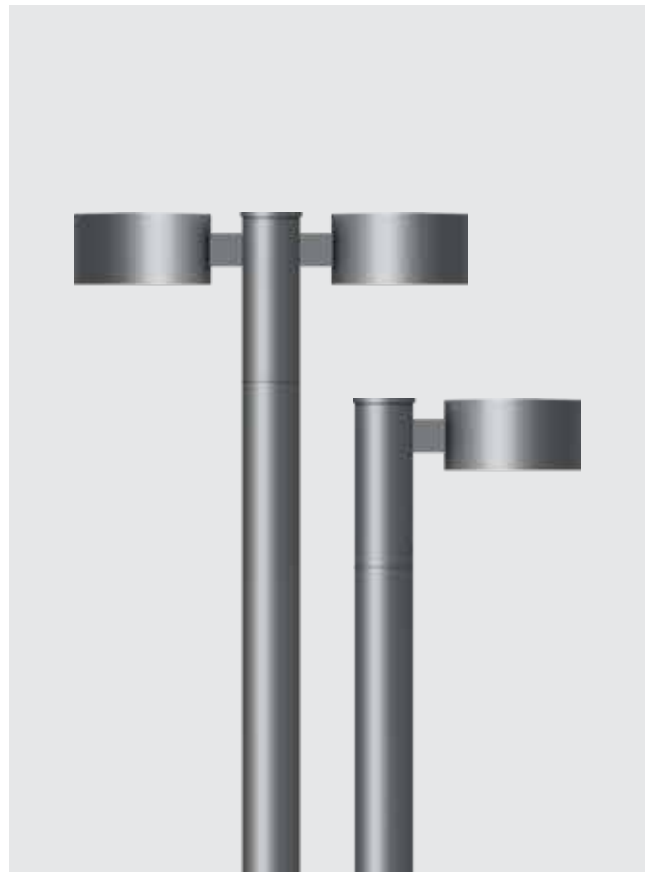



RYAN SCHOOL, BANGALORE

Technical Specifications

General

ID	: 22572
System Wattage	: 50W / 100W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Pipe
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for mounting on Ø76 / Ø88.9mm
Finish	: Powder coated RAL 9004 Black RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >88%

Optical Performance

Optical Distribution	: Type II / Type III / Type IV
----------------------	--------------------------------

