

MICROLED are compact IP67 LED fittings suitable for down light, Wall recessed and walkover for both indoor & outdoor applications. Small dimension with flush mounting installation. It is equipped with a screwless round front ring in STAINLESS STEEL with Symmetrical. These fixtures are perfect for creating very defined effects of accent light. On request, these luminaires are also available in Red, Green, Blue and Amber.

Product Description

- Luminaire body and screwless front ring made from solid billet of 316 grade stainless steel.
- Silicone seal gasket ensures IP67 rating.
- Asymmetrical / Clear / Prismatic / Opal toughened glass of 4mm thickness.
- Polycarbonate optical lens.
- Luminaire hard wired with 2 x 0.5mm² cable of 0.5 metre length.
- Supplied with mounting sleeve for preparing recessed opening in ground or wall.
- Luminaire operating voltage is 24Vdc. Non-Integral luminaires supplied with suitable external dc to dc converter, to be installed with suitable IP Junction box.
- Low Voltage at 24Vdc assures safety.
- Ordering guide : KL-24085-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K.
- Options : Red / Green / Blue / Amber (On Request).



Product Benefits


- High luminous efficiency at reduced wattage.
- Compact luminaire provides distinctive lighting effects for wall architecture & accent lighting.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Walk ways, Facades, Landscapes, Architectural facade elements.

Accessory

Polypropylene mounting sleeve for easy installation.

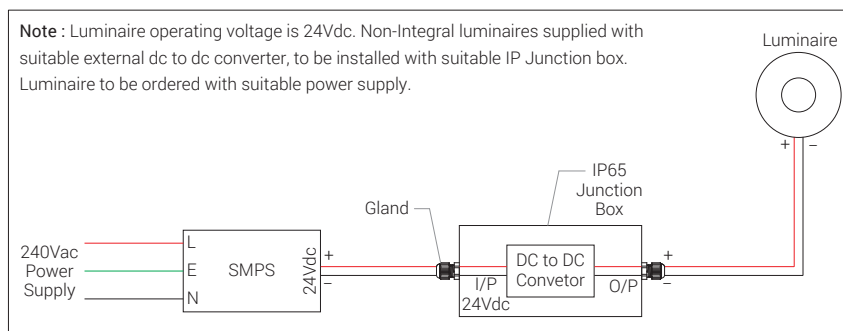



OPEN SOURCE



Technical Specifications

General

ID : 24085
System Wattage : 1W LED
Driver Non-Integral : Constant Voltage
Operating Voltage : 24Vdc
Operating Temperature : -15°C~+50°C

Physical

Body & Front Ring : 316 Grade Stainless Steel
Diffuser : Asymmetrical / Clear / Prismatic / Opal Toughened Glass
Mounting Sleeve : Polypropylene Black
Mounting : Wall / Floor - Recess

Light Source




Light Source : NICHIA
CRI (Ra) : >80
LED Colour Temperature : 2700K / 3000K / 4000K 5700K

Driver

Power Supply : Non Integral

Optical Performance

Optical Beam Angle : 12° / 24° / 40°



Mounting Sleeve

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

MINILED are compact IP67 LED fittings suitable for down light, Wall recessed and walkover for both indoor & outdoor applications. Small dimension with flush mounting installation. It is equipped with a screwless round front ring in STAINLESS STEEL. These fixtures are perfect for creating very defined effects of accent light. On request, these luminaires are also available in Red, Green, Blue and Amber.

Product Description

- Luminaire body and screwless front ring made from solid billet of 316 grade stainless steel.
- Silicone seal gasket ensures IP67 rating.
- Asymmetrical / Clear / Prismatic / Opal toughened glass of 4mm thickness.
- Polycarbonate optical lens.
- Luminaire hard wired with 2 x 0.5mm² cable of 0.5 metre length.
- Supplied with mounting sleeve for preparing recessed opening in ground or wall.
- Luminaire operating voltage is 24Vdc. Non-Integral luminaires supplied with suitable external dc to dc converter, to be installed with suitable IP Junction box.
- Low Voltage at 24Vdc assures safety.
- Ordering guide : KL-24086-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K.
- Options : Red / Green / Blue / Amber (On Request).



Product Benefits


- High luminous efficiency at reduced wattage.
- Compact luminaire provides distinctive lighting effects for wall architecture & accent lighting.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Walk ways, Facades, Landscapes, Architectural facade elements.

Accessory

Polypropylene mounting sleeve for easy installation.

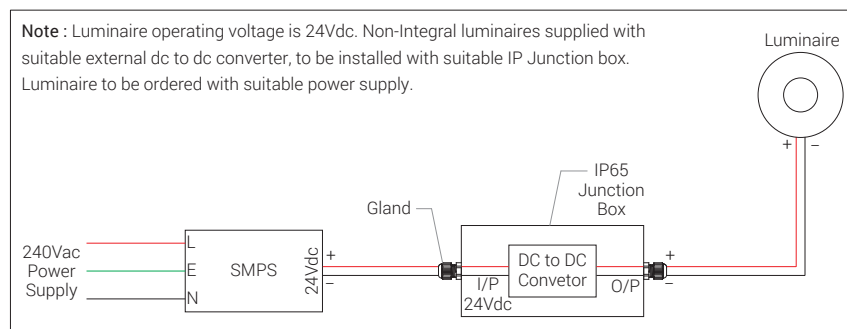



OPEN SOURCE

Technical Specifications

General

ID	: 24086
System Wattage	: 3W / 5W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body & Front Ring	: 316 Grade Stainless Steel
Diffuser	: Asymmetrical / Clear / Prismatic / Opal Toughened Glass
Mounting Sleeve	: Polypropylene Black
Mounting	: Wall / Floor - Recess

Light Source




Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Non Integral
--------------	----------------

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------



Mounting Sleeve

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in