


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.23V I:0.0533A P:12.213W PF:0.9954 Freq:50.00Hz Lamp Flux:1640.42x1 lm		
NAME: ZEDO - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:0.760Kg
SPEC.:2700K, NICHIA, CRI 80	DIM.: 220 x 40 x 95	SERIAL No.:INT/2024/07/108
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 59.76 lm/W
MODEL	KL-2767	Imax(cd)	595.4	S/MH(C0/180)	1.44	
NOMINAL POWER(W)	12	LOR(%)	44.5	S/MH(C90/270)	0.63	
RATED VOLTAGE(V)	230	TOTAL FLUX(lm)	729.80	η UP,DN(C0-180)	0.0,43.7	
NOMINAL FLUX(lm)	1640.42	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,0.8	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	230	η down(%)	44.5	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

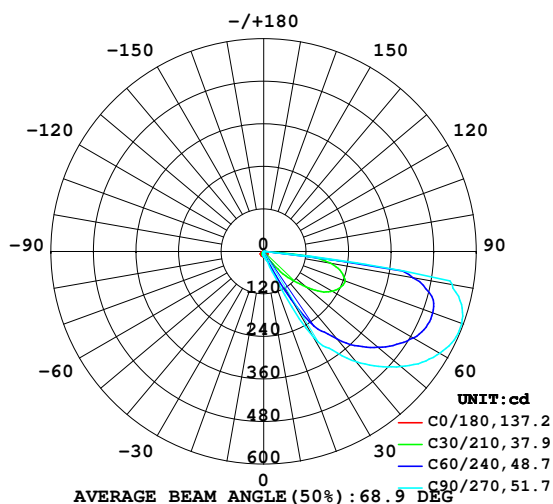

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

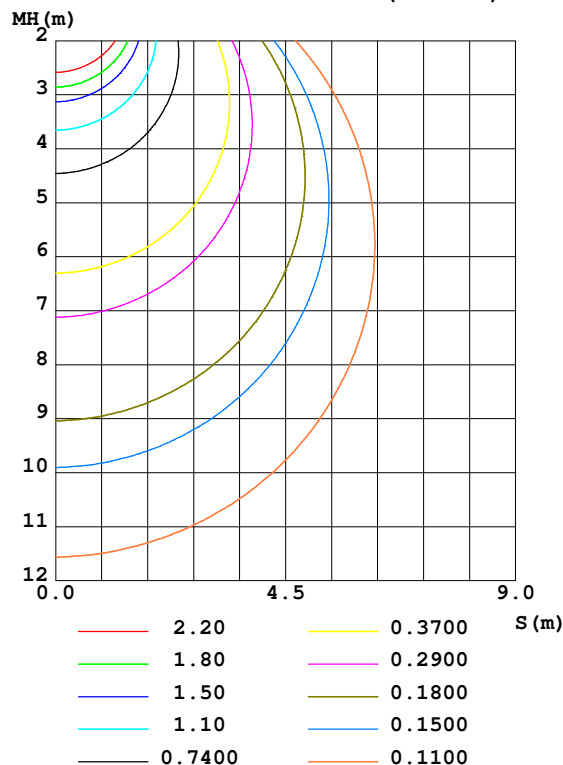

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:K-LITE
Test Date:21 August 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity:39.2%
Test Distance:2.001m [K=1.0000]
Remarks: