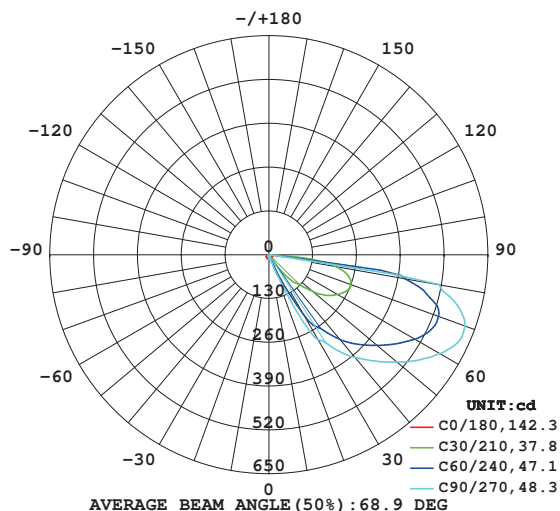
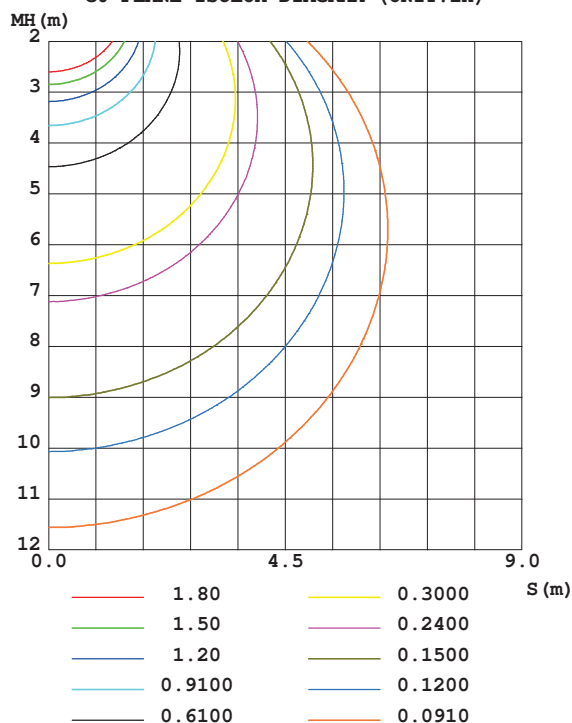


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.35V I:0.0550A P:12.368W PF:0.9758 Freq:50.00Hz Lamp Flux:1494.72x1 lm		
NAME: ZEDO SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:0.735kg
SPEC.:3000K, NICHIA, CRI 80	DIM.: 220 x 40 x 95	SERIAL No.:INT/2023/10/49
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 58.31 lm/W
MODEL	KL-2767	I _{max} (cd)	622.5	S/MH (C0/180)	1.43	
NOMINAL POWER (W)	12	LOR (%)	48.3	S/MH (C90/270)	0.53	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	721.21	η UP, DN (C0-180)	0.0, 47.6	
NOMINAL FLUX (lm)	1494.72	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	48.3	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.1DEG
 Operators:K-LITE
 Test Date:25 October 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 36.3%
 Test Distance:1.900m [K=1.0186]
 Remarks: