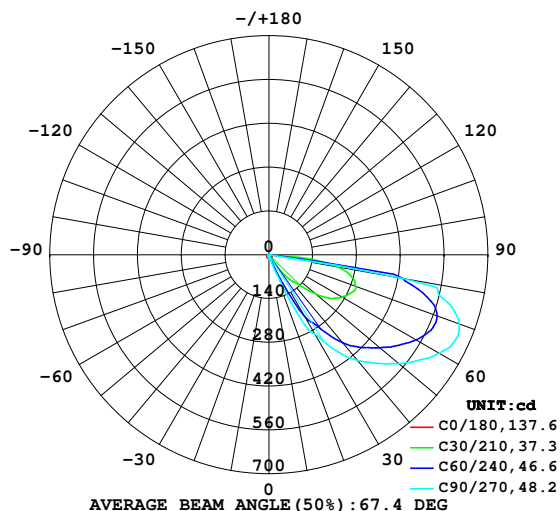
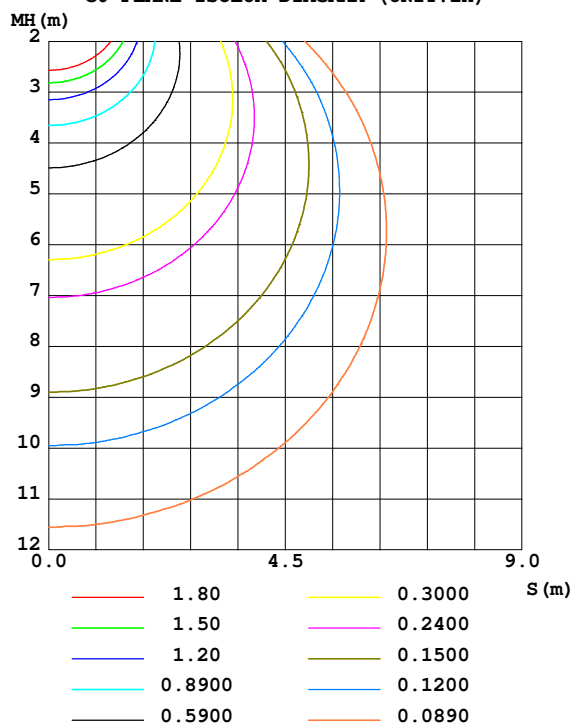


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.10V I:0.0547A P:12.238W PF:0.9727 Freq:49.98Hz Lamp Flux:1983.36x1 lm		
NAME: ZEDO - SURFACE MOUNTING	TYPE:PATH FINDERS	WEIGHT:0.735Kg
SPEC.:4000K,NICHIA, 80 CRI	DIM.: 220 x 40 x 95	SERIAL No.:INT/2023/11/64
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 62.23 lm/W
MODEL	KL-2767	I _{max} (cd)	658.2	S/MH (C0/180)	1.41	
NOMINAL POWER (W)	12	LOR (%)	38.4	S/MH (C90/270)	0.68	
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	761.56	η UP, DN (C0-180)	0.0, 37.9	
NOMINAL FLUX (lm)	1983.36	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 0.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE (V)	230	η down (%)	38.4	CIBSE SHR MAX	1.00	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 24.1DEG
 Operators:K-LITE
 Test Date:09 November 2023

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.417
 Humidity: 39.7%
 Test Distance:1.935m [K=1.0000]
 Remarks: