



Technical Specifications

General

ID	: 21795
System Wattage	: 12W
Driver Integrated	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium Tube & Die-Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Surface
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source



Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K 4000K / 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 1376 lm
Light Distribution	: Type IV

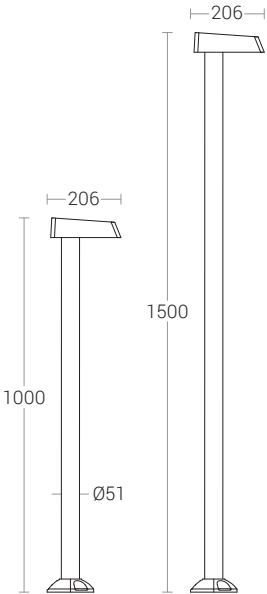

Applied Photometry : H=1m



Applied Photometry : H=1.5m

