



SHIMLA HELIPAD



Technical Specifications

General

ID	: 21813
System Wattage	: 30W / 50W Sym
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun Aluminium
Diffuser	: Translucent acrylic
Mounting	: Suitable for mounting to M30
Finish	: Powder coated
	: RAL 9004 Black
	: RAL 9007 Grey aluminium
	: RAL 7016 Anthracite grey
	: Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230 - 240Vac
Frequency	: 50-60Hz
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV / 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

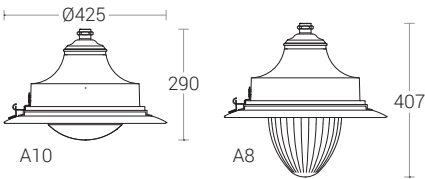

Diffuser Options



A8-Translucent Acrylic A10-Translucent Acrylic

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in