



VARANASI CITY

Technical Specifications

General

ID	: 21814
System Wattage	: 50W / 100W / 150W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun Aluminium
Diffuser	: Clear acrylic / Clear Polycarbonate
Mounting	: Suitable for mounting to internally threaded pipe of designation M30

Finish

: Powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%

Optical Performance

Optical Distribution	: Type II / Type III / Type IV
----------------------	--------------------------------

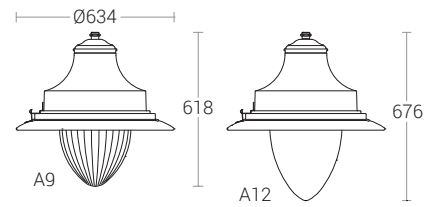

Diffuser Options



A9 - Clear Acrylic

A12 - Clear Polycarbonate

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in