



KOMATI CHERUVU, SIDDIPET



Technical Specifications

General

ID	: 21816
System Wattage	: 30W / 50W Sym
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun Aluminium
Diffuser	: Translucent acrylic
Mounting	: Suitable for mounting to internally threaded pipe of designation : M30

Finish

: Powder coated
RAL 9004 Black & Gold
Graphite grey & Gold
RAL 9007 Grey aluminium & Gold
RAL 7016 Anthracite grey & Gold

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230 - 240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV / 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

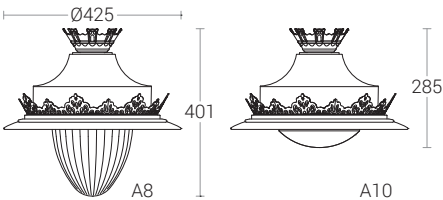


Diffuser Options



A8-Translucent Acrylic A10-Translucent Acrylic

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

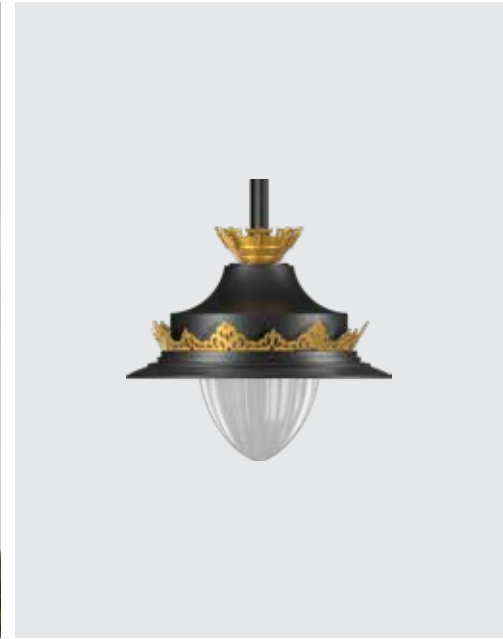

Technical Specifications

General

ID	: 21816
System Wattage	: 30W / 50W Asy
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun Aluminium
Diffuser	: Clear acrylic / Clear Polycarbonate
Mounting	: Suitable for mounting to internally threaded pipe of designation M30

Finish

: Powder coated
RAL 9004 Black & Gold
Graphite grey & Gold
RAL 9007 Grey aluminium & Gold
RAL 7016 Anthracite grey & Gold

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230 - 240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV / 6KV
Efficiency	: >85%

Optical Performance

Optical Distribution	: Type II / Type III / Type IV
----------------------	--------------------------------

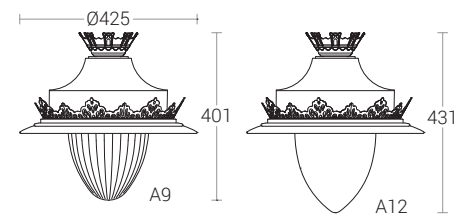

Diffuser Options



A9-Clear Acrylic

A12-Clear Polycarbonate

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in