



ALIPORE JAIL MUSEUM, KOLKATA



Technical Specifications

General

ID	: 22528
System Wattage	: 1 x 6W / 2 x 6W 1 x 12W / 2 x 12W 1 x 18W / 2 x 18W
Driver Integral	: Constant Current
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded & die-cast aluminium
Diffuser	: Clear toughened glass
Mounting	: Surface - Wall
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source



Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K/ 4000K 6500K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

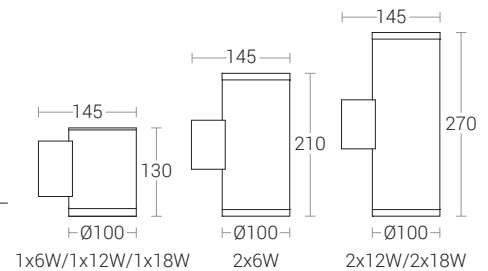

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in