




SATTVA HORIZON, BENGALURU

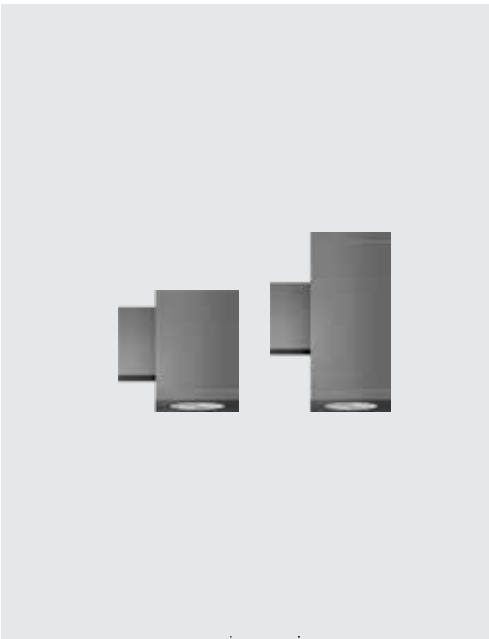

Technical Specifications

General

|                       |                                                             |
|-----------------------|-------------------------------------------------------------|
| ID                    | : 22529                                                     |
| System Wattage        | : 1 x 6W / 2 x 6W<br>1 x 12W / 2 x 12W<br>1 x 18W / 2 x 18W |
| Driver Integral       | : Constant Current                                          |
| Operating Voltage     | : 100-300Vac                                                |
| Operating Temperature | : -15°C~+50°C                                               |

Physical

|          |                                                                                                           |
|----------|-----------------------------------------------------------------------------------------------------------|
| Body     | : Extruded & die-cast aluminium                                                                           |
| Diffuser | : Clear toughened glass                                                                                   |
| Mounting | : Surface - Wall                                                                                          |
| Finish   | : Powder coated<br>RAL 9004 Black<br>RAL 9007 Grey aluminium<br>RAL 7016 Anthracite grey<br>Graphite grey |

Light Source



|                        |                                 |
|------------------------|---------------------------------|
| Light Source           | : CITIZEN                       |
| CRI (Ra)               | : >90                           |
| LED Colour Temperature | : 2700K / 3000K/ 4000K<br>6500K |

Driver

|                  |              |
|------------------|--------------|
| Power Supply     | : Integral   |
| Input Voltage    | : 230-240Vac |
| Frequency        | : 50-60 Hz   |
| Power Factor     | : >0.95      |
| Surge Protection | : 4KV        |
| Efficiency       | : >80%       |

Optical Performance

|                    |                   |
|--------------------|-------------------|
| Optical Beam Angle | : 12° / 24° / 40° |
|--------------------|-------------------|

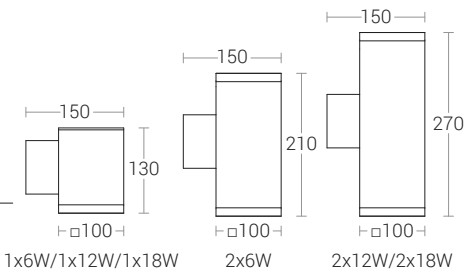

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)