



Technical Specifications

General

ID	: 22543
System Wattage	: 9W
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Front Ring	: 316 Grade Stainless Steel
Diffuser	: Translucent Polycarbonate
Mounting Sleeve	: ABS - Black
Mounting	: Recess

Light Source





Light Source	: CITIZEN
CRI (Ra)	: 90
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K

Driver


Power Supply	: Integral
Input Voltage	: 240Vac
Frequency	: 50-60 Hz
Power Factor	: ≥ 0.9
THD	: $< 10\%$
Surge Protection	: 2KV
Efficiency	: $> 80\%$

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 24 lm / 39 lm / 43 lm
Light Distribution	: 1 Way / 2 Way / 4 Way



Photometric Data

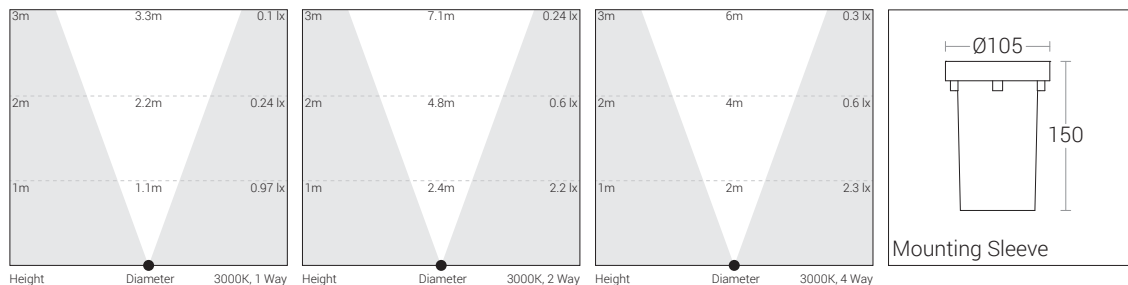

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in