



STATUE OF EQUALITY RAMANUJA, HYDERABAD

Technical Specifications

General

ID	: 22545
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 150-270Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Spike / Bracket / Tilt
Finish	: Powder coated
	RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

Light Source


Light Source	: CITIZEN
CRI (Ra)	: 90
LED Colour Temperature	: 2700K, 3000K, 4000K 6500K

Driver






Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Optical Beam Angle	: 6° / 12° / 24° / 40°
--------------------	------------------------

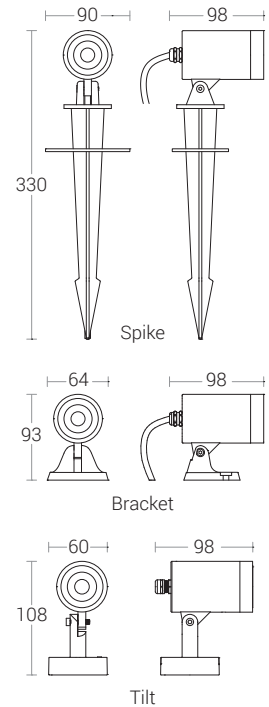

Cone Diagram



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in