




TABLET INDIA RESIDENCE, BOAR CLUB, CHENNAI

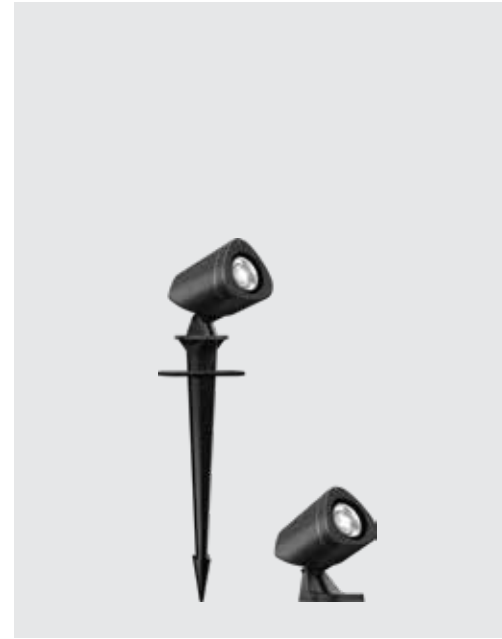

Technical Specifications

General

ID	: 22547
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-240Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Spike / Die-cast Aluminium Bracket
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

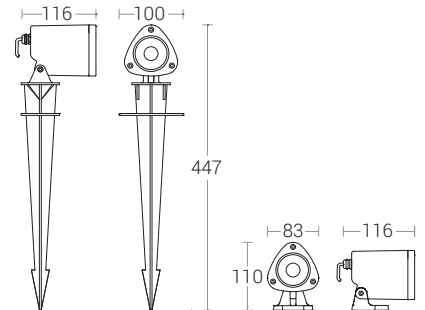


Photometric Data



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



NEHRU PARK, GUWAHATI

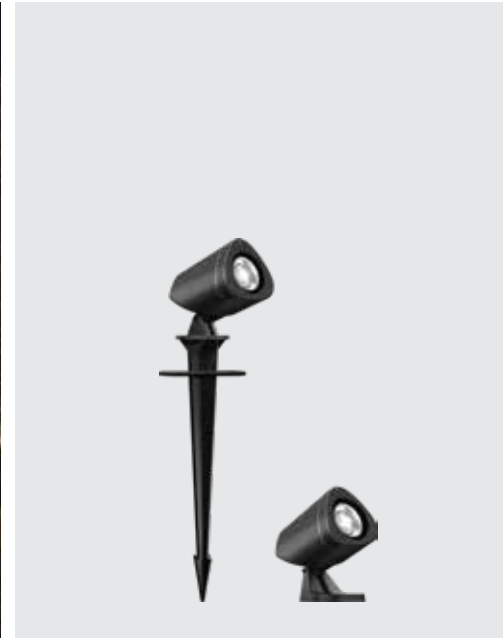

Technical Specifications

General

ID	: 22547
System Wattage	: 12W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Spike / Die-cast Aluminium Bracket
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source	: CITIZEN
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%

Optical Performance

Optical Beam Angle	: 12° / 24° / 40°
--------------------	-------------------

