


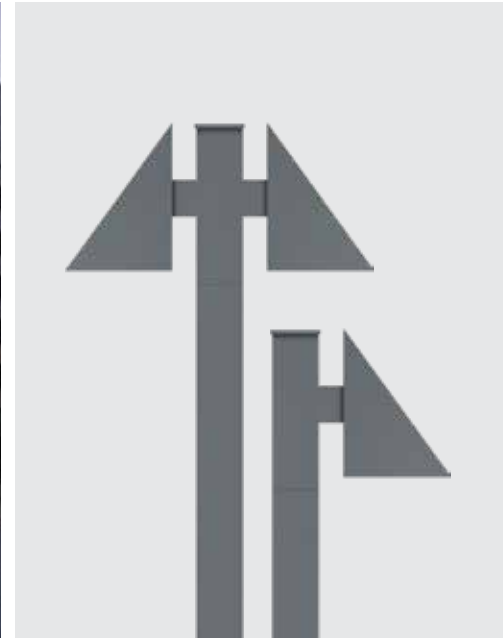

Technical Specifications

General

ID	: 22568
System Wattage	: 100W - Single Arm 200W - Double Arm
Driver Integral	: Constant Current
Operating Voltage	: 110-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Aluminium & Extruded Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for mounting on $\square 91$
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source	: LUMILEDS
CRI (Ra)	: ≥ 70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: $<10\%$
Surge Protection	: 6KV
Efficiency	: $>85\%$

Optical Performance

Light Distribution	: Type II
--------------------	-----------

