



OPEN SOURCE



Technical Specifications

General

ID	: 23098
System Wattage	: 4 x 60W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Bracket - Surface
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: ≥70
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <5.1%
Surge Protection	: 4KV
Efficiency	: >90%
Dimmable Option	: Analog / Dali

Optical Performance

Beam Angle	: 25° / 40° / 60°
------------	-------------------

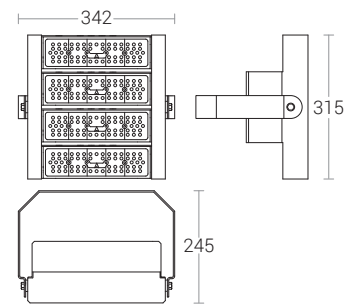

Photometric Data

4 x 60W		5700K, BA:40°		4 x 60W		5700K, BA:60°	
Height	Diameter	Height	Diameter	Height	Diameter	Height	Diameter
2m	1.1m	13074 lx		2m	1.9m	4759 lx	
4m	2.2m	3269 lx		4m	3.8m	1189 lx	
6m	3.4m	1453 lx		6m	5.7m	529 lx	
8m	4.5m	817 lx		8m	7.5m	297 lx	
10m	5.6m	523 lx		10m	9.4m	190 lx	

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in