



RELIANCE GIR, JUNAGADH, AHMEDABAD

Technical Specifications

General

ID	: 24186 / 24187
System Wattage	: 1 x 24W / 2 x 24W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Rectangular Extruded Aluminium Tube with Die-Cast Aluminium
Diffuser	: Clear acrylic
Mounting	: Floor - Surface
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey
Special Finish	: Bamboo / Teak

Light Source

Light Source	: NICHIA
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver



Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 2.5KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Asymmetrical
--------------------	----------------



Note : No Loop-in / Loop-out arrangement

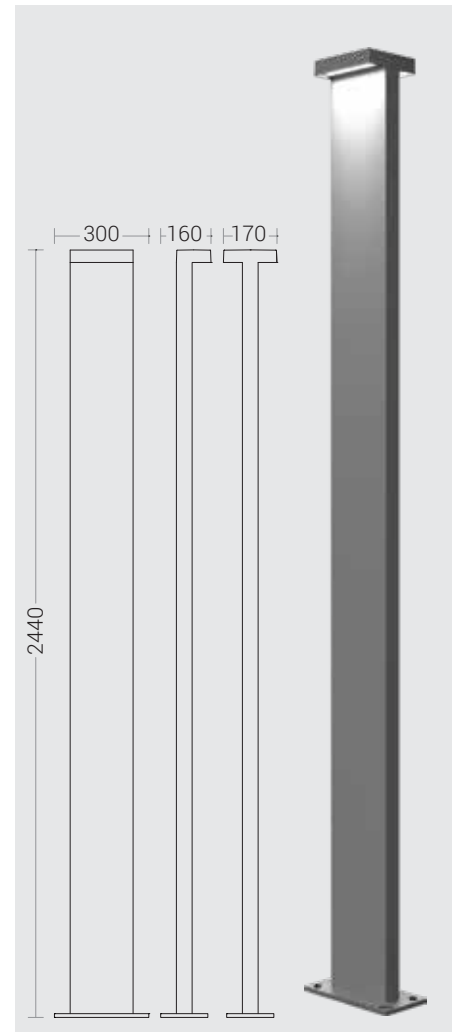

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in