


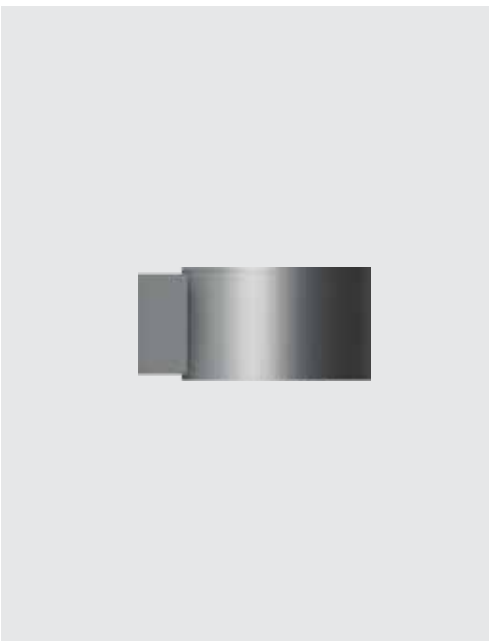

Technical Specifications

General

ID	: 24371
System Wattage	: 50W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Wall - Surface
Finish	: Powder coated
	RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

Light Source



Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >70
LED Colour Temperature	: 2700K, 3000K / 4000K
	5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >88%

Optical Performance

Optical Distribution	: Type II
----------------------	-----------



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in