



Technical Specifications

General

ID	: 24392
System Wattage	: 100W
Wattage Range	: 60W - 120W
Driver Integral	: Constant Current
Operating Voltage	: 120-270Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Suitable for Mounting on 60mm OD pipe

Finish	: Powder coated
	: RAL 9004 Black
	: RAL 9007 Grey aluminium
	: RAL 7016 Anthracite grey
	: Graphite grey

Light Source


Light Source	: LUMILEDS / Equivalent
CRI (Ra)	: ≥70 (>80 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50Hz
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV (Additional Surge Protection on Request)
Efficiency	: >85%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 12092 lm
Optical Distribution	: Type II
For other IES files - Please refer Online	

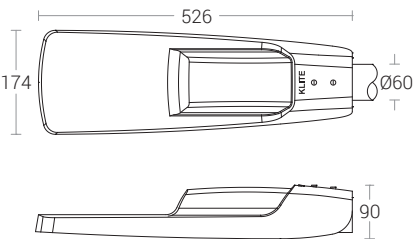

Note : • Luminous flux / Power consumption may vary by ±10%.
• Luminaire efficiency upto 130 lm/W.

Photometric Data

