



Technical Specifications

General

ID	: 24452
System Wattage	: 200W LED
Driver Integral	: Constant Current
Operating Voltage	: 110-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun aluminium & AL sheet
Diffuser	: Polycarbonate Optical Lens
Mounting	: Suitable for 88.9mm OD pole.

Finish	: Powder coated
	: RAL 9004 Black
	: RAL 9007 Grey aluminium
	: RAL 7016 Anthracite grey
	: Graphite grey

Light Source


Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: ≥70
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

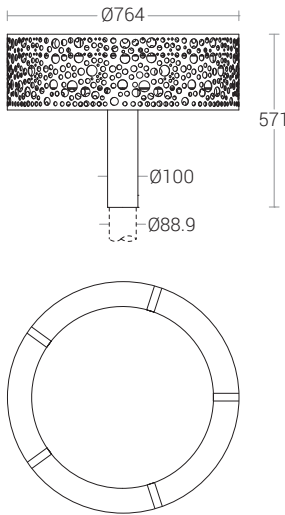

Light Distribution



Applied Photometry : H=10m