



OPEN SOURCE

Technical Specifications

General

ID	: 24460 / 24461
System Wattage	: 50W / 100W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-265Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Mounting	: Suitable for mounting on Ø76 / Ø88.9 / □72 / □91
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Type III (Type II & Type IV on request)
--------------------	--

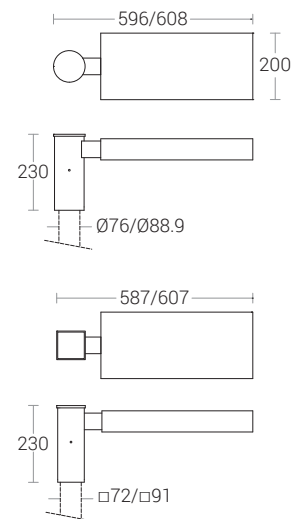



OPEN SOURCE

Technical Specifications

General

ID	: 24460 / 24461
System Wattage	: 100W / 200W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-265Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Mounting	: Suitable for mounting on Ø76 / Ø88.9 / □72 / □91
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source

Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >70
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 6KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Type III (Type II & Type IV on request)
--------------------	--

