



Technical Specifications

General

ID	: 24465
System Wattage	: 12W / 24W LED
Driver Integrated	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-Cast Aluminium
Diffuser	: Clear Toughened Glass
Mounting	: Surface - Wall
Finish	: Powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: CITIZEN / LUMILEDS
CRI (Ra)	: 90 / 80
LED Colour Temperature	: 2700K / 3000K / 4000K 6500K for COB / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >80%


Optical Performance

Light Distribution	: Asymmetrical / Type II
--------------------	--------------------------

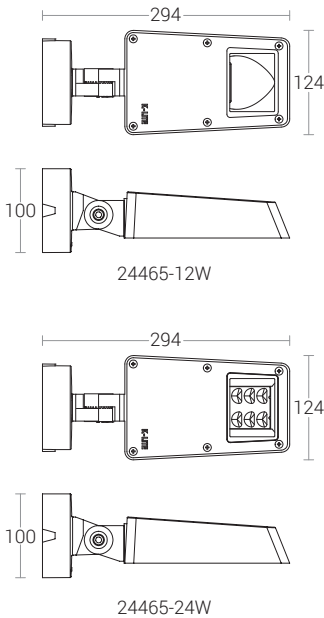

Photometric Data

12W - Asy. Light Pattern

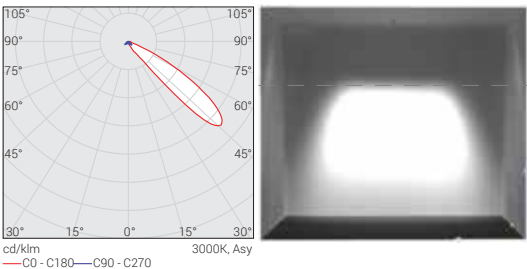

24W - Type II

