


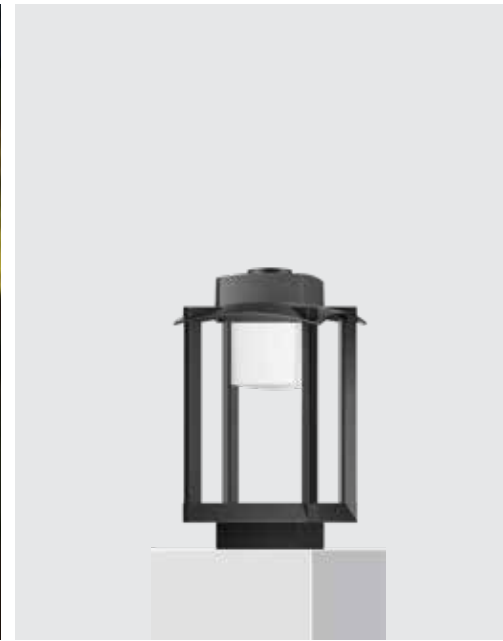

## Technical Specifications

### General

|                       |                    |
|-----------------------|--------------------|
| ID                    | : 24625            |
| System Wattage        | : 12W LED          |
| Driver Integral       | : Constant Current |
| Operating Voltage     | : 100-277Vac       |
| Operating Temperature | : -15°C~+50°C      |

### Physical

|          |                             |
|----------|-----------------------------|
| Body     | : Die-Cast Aluminium        |
| Arm      | : Extruded Aluminium        |
| Diffuser | : Translucent Polycarbonate |
| Mounting | : Surface                   |
| Finish   | : Powder coated             |
|          | RAL 9004 Black              |
|          | RAL 9007 Grey aluminium     |
|          | RAL 7016 Anthracite grey    |
|          | Graphite grey               |

### Light Source



|                       |                                 |
|-----------------------|---------------------------------|
| Light Source          | : CITIZEN                       |
| CRI (Ra)              | : 90                            |
| ED Colour Temperature | : 2700K / 3000K / 4000K / 6500K |

### Driver

|                  |              |
|------------------|--------------|
| Power Supply     | : Integral   |
| Input Voltage    | : 230-240Vac |
| Frequency        | : 50-60Hz    |
| Power Factor     | : >0.95      |
| THD              | : <10%       |
| Surge Protection | : 4KV        |
| Efficiency       | : >80%       |

### Optical Performance

|                    |               |
|--------------------|---------------|
| Light Distribution | : Symmetrical |
|--------------------|---------------|

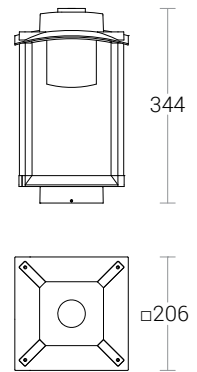

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)