


Ultra high efficiency LED flood light luminaires designed to provide uniform illumination in open spaces. Design and construction of the luminaires is characterized by its high luminous efficiency, extremely long service life. Sturdy construction makes Aston Prime especially suitable for areas where a high level of robustness is required.

### Product Description

- Housing made of aluminium & self supported steel frame work
- High efficiency polycarbonate optical lens
- Excellent thermal management heat sink
- Luminous flux up to 9000 lm  $\pm$ 300 lm for 60°(60W)
- Efficiency up to 150 lm/W for 60°
- Mounting bracket to facilitate proper aiming of the luminaire at desired angle during installation.
- Available in 60°
- Cable entries for through-wiring of mains supply cable.
- Luminaire supplied with fast IP67 Connectors.
- Integral constant current power supply
- CRI ( Ra ) : >70
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4209-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 5700K



### Product Benefits

- High luminous efficiency at reduced wattage.
- Versatile use, Simple installation
- Varied optics
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Highmast, Ports & Terminals, Sports Lighting, Industrial sector, Ware houses, Cold storage, Logistic hubs, Commercial & Business centres and Area Lighting.

### Available Finish


Pure polyester powder coated Graphite grey and Red.

### Accessories



Anti - Glare Visor



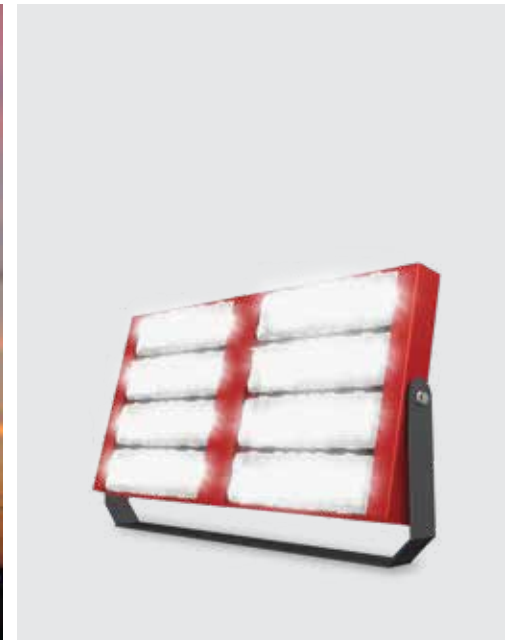

**Technical Specifications**

**General**

ID	: 4209
System Wattage	: 8 x 60W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

**Light Source**

Light Source	: LUMILED
LED Lumens	: Upto 79680 lm for 60°
CRI (Ra)	: ≥70
LED Colour Temperature	: 3000K / 4000K / 5700K

**Driver**


Power Supply	: Integral
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >90%

**Physical**

Body	: Extruded Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Surface - Bracket / Pole - Bracket
Finish	: Graphite Grey & Red

**Optical Performance**

Colour Temperature	: 4000K
Luminous flux	: 69176 lm 60°
Beam Angle	: 60°

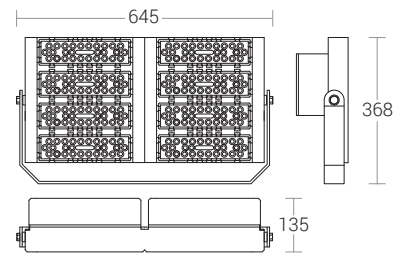

**Photometric Data**

